

MATTHEWS

A close-up photograph of a dandelion seed head with its seeds blowing away, set against a dark, textured background. The seeds are captured in motion, creating a sense of lightness and air. The background is a deep, mottled purple or maroon color.

FAN COMPANY

PRODUCT CATALOG
Volume III



Matthews Fan Company has been at the forefront of bringing unique ceiling, wall and portable fan products to both the residential and commercial markets since 1992.

Our innovative fans combine traditional, contemporary and industrial designs, retrospective elements and always high performance.

Matthews proudly integrates American parts and labor into the production of all of our products.

Visit one of our retailer partners or contact us for more information regarding our quality products and customization.

Tel: 847-680-9043

Fax: 847-680-8140

www.MatthewsFanCo.com



An aerial photograph of a dense evergreen forest, showing a vast expanse of green trees from a high angle.

GREEN

A photograph of a bright blue sky with scattered white clouds, providing a clean background for the text.

MATTERS

Matthews' fans achieve some of the highest efficiency ratings in the industry through:

- DC Motor technology allows for large, powerful blades which provide more robust airflow and ultra-quiet operation.
- Rotational fans reduce HVAC costs by mixing ambient air more thoroughly.
- Directional and Wall fans provide columnar airflow which can be customized.

Matthews does not field destroy

- 95% of damaged and defective materials are recycled or re-purposed.

Matthews achieves low defect rates because:

- All fans are visually inspected before shipping.
- All rotational and oscillating fans are bench tested before shipping.

MATTHEWS FAN COMPANY PRODUCTS

ATLAS



Acqua
pg. 8-9



Alessandra
pg. 10-11



Alessandra-LK
pg. 12-13



America
pg. 14-15



Dagny
pg. 16-17



Dagny LK
pg. 18-19



Dana
pg. 20-21



Diane
pg. 22-23



Donaire
pg. 24-25



Eliza
pg. 26-27



Eliza-H
pg. 28-29



Irene-3
pg. 30-31



Irene-3H
pg. 32-33



Irene-3HLK
pg. 34-35



Irene-5
pg. 36-37



Irene-5H
pg. 38-39



Irene-5HLK
pg. 40-41



Kaye
pg. 42-43



Laura
pg. 44-45



Lindsay
pg. 46-47



Melody
pg. 48-49



Molly
pg. 50-51



Mollywood
pg. 52-53



Nan
pg. 54-55



Nan XL
pg. 56-57



Patrícia-3
pg. 58-59



Patrícia-5
pg. 60-61



Super Janet
pg. 62-63

MATTHEWS-GERBAR



Ar Ruthiane
pg. 64-65



Bianca Direcional
pg. 66-67



Brisa 2000
pg. 68-69



Bruna Parede
pg. 70-71



Duplo-Dinamico
pg. 72-73



Italo Ventania
pg. 74-75



Jarold Direcional
pg. 76-77



Michelle Parede
pg. 78-79



Vent-Bettina
pg. 80-81



shown in Textured Bronze
with Metal Blades and
Decorative Cage




Acqua




The Acqua 360° rotational fan is thoughtfully designed to resemble the molecular structure of water, Earth's most precious resource. The Acqua offers fluid lines and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Acqua carries a limited lifetime warranty.


Product Features




American Labor




AC Motor




360° Rotation




Safety Cage Compatible




Damp Location




Soothing White Noise



LED Lamp



Remote Control



Unipack Shipping




shown in Textured Bronze
with Barn Wood Blades

shown in Matte Black
with Mahogany Blades

shown in Matte Black
with Metal Blades in
decorative cage

shown in Textured Bronze
with Matte Black Blades

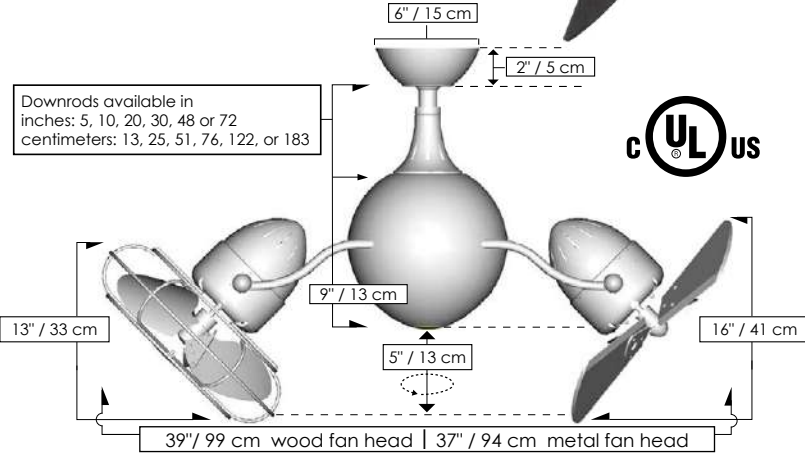

ACQUA

FINISH AND BLADE OPTIONS

| SKU# | AQ-XX-XXXX (Model+Finish+Blade) | |
|---------------------------|---|-----------------------------------|
| Standard Finishes | Matte Black Textured Bronze | BK TB |
| Blade Styles and Material | Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage | WDBW WD WDBK MTL MSAF |

TECHNICAL SPECS

| | |
|--|--|
| Fan Weight | 27 lbs |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Rotation | Yes |
| Downrods Lengths <i>Field cuttable.</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Overall Drop | 16 inches / 41 cm + downrod length |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Head Options | Solid Wood | Metal with Guard |
|--------------------|-------------------|-----------------------------------|
| Fan Diameter | 39 inches / 99 cm | 37 inches / 94 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Safety Cage or Decorative Cage |
| RPM (Low / High) | 721 / 1199 | 1040 / 1445 |
| CFM (Low / High) | 2750 / 4058 | 1825 / 3167 |
| Watts (High) | 101.25 | 80.50 |
| CFM/Watt (High) | 40.80 | 39.34 |
| Blade Pitch | 19° | 31° |

LIGHT KIT PHOTOMETRICS

| | |
|----------------------------|----------|
| Lamping (Replaceable) | GU10 LED |
| Remote Dimmable | No |
| Delivered Temperature in K | 2969 |
| Delivered Lumens | 337.30 |
| CRI | 94 |
| Watts | 5 |
| Hours | 36,000 |

Light kit longevity if used 6 Hours/Day: 16.5 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 29°

Black 3-speed RF remote
control with reverse



ACCESSORY

Decora-style, 3-speed,
non-dimmable wall control





Alessandra

shown in Matte White
with 56" Gray Ash blades

shown in Matte Black
with 72" Matte Black blades

shown in
Matte Black with
42" Walnut blades

shown in Brushed Nickel
with 56" Brushed Nickel blades

shown in
Textured Bronze
with 42" Walnut blades

shown in Brushed Brass
with 56" Matte White blades

shown in
Matte White with
42" Barn Wood blades

Minimal form with maximum efficiency. With a wide range of blade sizes, the Alessandra can accommodate any space. This thoughtfully crafted and versatile fan will complement any aesthetic and improves the health and comfort of any room. Highly customizable, the Alessandra is available in five different body finishes, seven blade options, and even an option with a CCT light kit as the Alessandra-LK. Suitable for wet locations. Backed by a limited lifetime warranty, our fans are of the highest quality and will dutifully perform for years to come. Constructed of cast aluminum and heavy stamped steel, the Alessandra has a limited lifetime warranty.

Product Features



ALESSANDRA

FINISH AND BLADE OPTIONS

| SKU# | AK-XXXX-XXX-XX (Model+Finish+Blade+Diameter) | |
|-------------------|---|------|
| Standard Finishes | Brushed Brass | BRBR |
| | Brushed Nickel | BN |
| | Matte Black | BK |
| | Matte White | MWH |
| Blade Finishes | Textured Bronze | TB |
| | Barn Wood | BW |
| | Brushed Nickel | BN |
| | Matte Black | BK |
| | Matte White | MWH |
| Fan Diameter | Gray Ash | GA |
| | Walnut | WN |
| | 42 inches / 107 cm | 42 |
| | 56 inches / 142 cm | 56 |
| | 72 inches / 183 cm | 72 |

TECHNICAL SPECS

| | |
|---|---|
| Fan Diameter | inches: 42, 56 or 72 centimeters: 107, 142 or 183 |
| Blade Material | ABS |
| Overall Drop | 8 inches / 20 cm + downrod length |
| Fan Weight | 17 lbs |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Voltage | 110 or 220 |
| Motor Type | DC |
| Environment | Wet location. All weather blade system. Neither outdoor coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm | 56 inch / 142 cm | 72 inch / 183 cm |
|------------------|---------------------|---------------------|---------------------|
| RPM (Low / High) | 53 / 235* | 51 / 202* | 48 / 86* |
| CFM (Low / High) | 941* / 5741 | 1692* / 7258 | 3727* / 9025 |
| Watts (High) | 20.37* | 32.61* | 36.08* |
| CFM/Watt (High) | 213* | 220* | 339* |
| Blade Pitch* | 13° | 13° | 13° |

*CFM data is approximate

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF
remote control
with reverse









White wireless
Decora-style,
6-speed,
wall control



NOTE: Only compatible with included controllers.

* Unipak is not available for 72" blade option

Blade Options

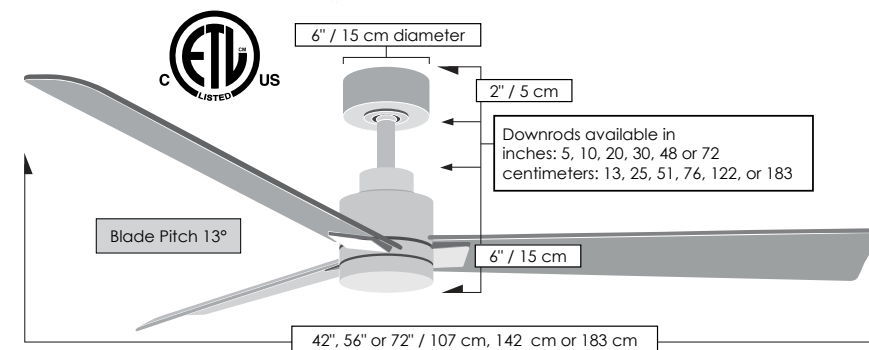



Alessandra-LK

Minimal form with maximum efficiency. With a wide range of blade sizes, the Alessandra-LK can accommodate any space. This thoughtfully crafted and versatile fan will complement any aesthetic and improves the health and comfort of any room. Highly customizable, the Alessandra-LK is available in five different body finishes, seven blade options, and a dimmable 2700K-6500K CCT light kit. Suitable for damp locations. Backed by a limited lifetime warranty, our fans are of the highest quality and will dutifully perform for years to come. Constructed of cast aluminum and heavy stamped steel, the Alessandra-LK has a limited lifetime warranty.

Product Features



DC Motor



Damp Location



Silent



LED Lamp



Dimmable Lamp



Remote Control








Wall Control



Unipack Shipping*



Blade Options

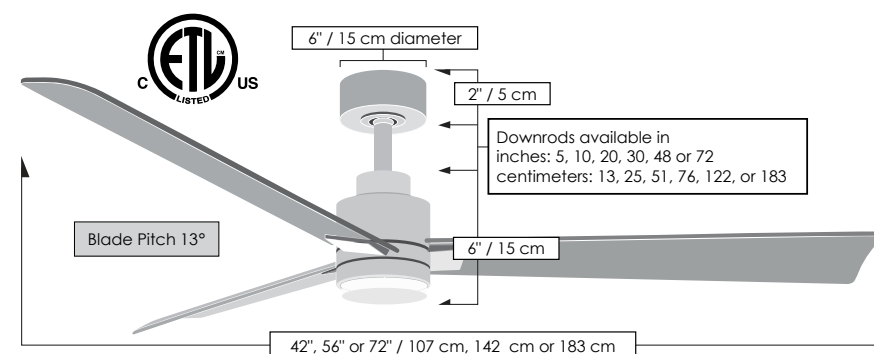

ALESSANDRA-LK

FINISH AND BLADE OPTIONS

| SKU# | AKLK-XXXX-XXX-XX (Model+Finish+Blade+Diameter) | |
|-------------------|---|------|
| Standard Finishes | Brushed Brass | BRBR |
| | Brushed Nickel | BN |
| | Matte Black | BK |
| | Matte White | MWH |
| Blade Finishes | Textured Bronze | TB |
| | Barn Wood | BW |
| | Brushed Nickel | BN |
| | Matte Black | BK |
| Fan Diameter | Matte White | MWH |
| | Gray Ash | GA |
| | Walnut | WN |
| | | |

TECHNICAL SPECS

| | |
|---|---|
| Fan Diameter | inches: 42, 56 or 72 centimeters: 107, 142 or 183 |
| Blade Material | ABS |
| Overall Drop | 8 inches / 20 cm + downrod length* |
| Fan Weight | 17 lb* |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Voltage | 110 or 220 |
| Motor Type | DC |
| Environment | Damp location for all finishes. Neither outdoor coastal, saltwater nor chlorine air compatible. |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm | 56 inch / 142 cm | 72 inch / 183 cm |
|------------------|---------------------|---------------------|---------------------|
| RPM (Low / High) | 53 / 235* | 51 / 202* | 48 / 86* |
| CFM (Low / High) | 941* / 5741 | 1692* / 7258 | 3727* / 9025 |
| Watts (High) | 20.37* | 32.61* | 36.08* |
| CFM/Watt (High) | 213* | 220* | 339* |
| Blade Pitch* | 13° | 13° | 13° |

*CFM data is approximate

LIGHT KIT PHOTOMETRICS

| Lamping (Replaceable) | Integrated LED |
|----------------------------|----------------|
| Remote Dimmable | Yes |
| Delivered Temperature in K | Variable |
| CRI | 90 |
| Watts | 20 |
| Hours | 60,000 |

Delivered Lumens

| 2700K | 3000K | 4000K | 5000K | 6500K |
|-------|-------|-------|-------|-------|
| 1431 | 1521 | 1703 | 1688 | 1523 |

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control



NOTE: Only compatible with included controllers.

* Unipak is not available for 72" blade options









America



The America fan is a practical solution for both residential or commercial spaces with a more traditional aesthetic. It is available with either 42 or 52 inch diameters, along with an optional light kit. The blades are reversible as either white or light oak tone finish. The America carries a limited lifetime warranty.

Product Features

| | | | | | |
|---|---|---|---|---|---|
|  American Labor |  AC Motor |  LED Lamp |  Dry Location |  Silent |  Unipack Shipping |
|---|---|---|---|---|---|

USA

Applicability to Buy American Act:
Domestic Construction Materials Clause (Feb 2009): 52-225-9 (4)(2)(i). The cost of its components mined, produced, or manufactured in the United States exceeds 50 percent of the cost of all its components.

Breakdown of Origin of Materials:
Ceiling fan parts are made in Taiwan, a World Trade Organization Government Procurement Agreement country. Final assembly and UL 507 electrical compliance testing will be done in the US. US labor will be used in the assembly, handling and testing of this fan.

| ITEM | ORIGIN | % of COST of ITEM |
|--------------------------|--------|-------------------|
| Fan Components | Taiwan | 41.18% |
| U.S. Labor MFC Facility* | USA | 34.46% |
| Domestic Shipping | USA | 10.34% |
| International Shipping | USA | 11.20% |
| US Duty | USA | 1.96% |
| Shipping Insurance | USA | 0.88% |

* US labor cost includes, but is not limited to: hands-on assembly, packaging and warehousing.

Taiwan

Applicability to Buy American Act - Construction Materials Under Trade Agreements:
Construction Materials Clause (Aug 2009): 52-225-11 as prescribed in 25-1102. Ceiling fan parts and assembly comprise a "WTO GPA country end-product."

Breakdown of Origin of Materials:
Ceiling fan is made in Taiwan, a World Trade Organization Government Procurement Agreement country.

| ITEM | ORIGIN | % of COST of ITEM |
|--|--------|-------------------|
| Ceiling Fan Components/ Assembly Labor | Taiwan | 74.59% |
| Shipping/ Handling / Insurance / Duty | USA | 25.41% |



LIGHT KIT PHOTOMETRICS

| | |
|---|----------|
| Lamping (Replaceable) | LED |
| Delivered Temperature in K | 3000 |
| Delivered Lumens | 805 (x2) |
| Watts | 18 (x2) |
| Hours | 25,000 |
| Light kit longevity if used 6 Hours/Day: 11.4 Years | |

AMERICA

FINISH AND BLADE OPTIONS

| SKU# | AM-XX-XX-XX (Model+Diameter+Light) | |
|--------------|--|----------|
| Light Kit | Without Light Kit Light Kit | NA LK |
| Fan Diameter | 42 inches / 107 cm 52 inches / 132 cm | 42 52 |

TECHNICAL SPECS


| | |
|---|--|
| Fan Diameters | inches: 42 or 52 centimeters: 107 or 132 |
| Blade Material | MDF |
| Overall Drops with both standard downrods: 3" and 9" | 13" without light kit and 3" downrod 19" with light kit and 3" downrod 19" without light kit and 9" downrod 25" with light kit and 9" downrod |
| Fan Weight | 21 lbs |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Lead length | 78" |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Motor size | 172 mm x 14 mm (3 speeds and forward/reverse) |
| Mounting | Vaulted ceiling canopy for up to 29° |
| Control | Pull-chain (Wall control available as accessory) |
| Light kit | Available as accessory with X2 GU24 sockets and frosted glass bowl. LED lamps. |
| Ambience | Silent |
| Safety Certification | UL Listed - Dry Location |
| Warranty | Limited Lifetime |

STANDARD EQUIPMENT

| |
|--------------------------------------|
| One downrod of 3 inches / 8 cm |
| One downrod of 9 inches / 23 cm |
| Vaulted ceiling canopy for up to 30° |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| | With 3" Downrod | With 3" Downrod | With 9" Downrod | With 9" Downrod |
|------------------|-------------------|-------------------|-------------------|-------------------|
| | 42 inch 107 cm | 52 inch 132 cm | 42 inch 107 cm | 52 inch 132 cm |
| RPM (Low / High) | 87 / 243 | 54 / 162 | 93 / 249 | 57 / 166 |
| CFM (Low / High) | 1488 / 4204 | 1313 / 4083 | 1419 / 4050 | 1699 / 4643 |
| Watts (High) | 60 | 64.67 | 61 | 59 |
| CFM/Watt (High) | 58 | 63.14 | 58 | 79 |
| Blade Pitch | 12° | 12° | 12° | 12° |

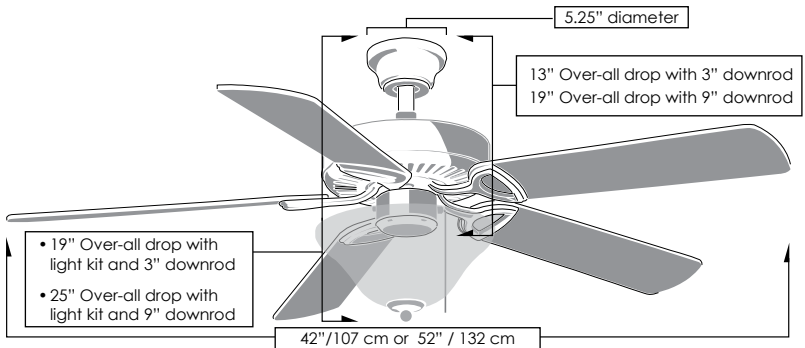

shown in Textured Bronze with Metal Blades and Decorative Cage



shown in Textured Bronze with Barn Wood Blades



shown in Textured Bronze with Matte Black Blades



shown in Matte Black with Mahogany Blades



shown in Textured Bronze with Metal Blades in Safety Cage



Dagny



The double-headed 360° rotational fan, Dagny, with cylindrical central housing and straight, parallel arms, is designed in the retrospective aesthetic. The Dagny offers smooth and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Dagny carries a limited lifetime warranty. The Dagny is also available with a light kit as the **Dagny-LK**.

Product Features



American Labor



AC Motor



360° Rotation



Safety Cage Compatible



Damp Location



Soothing White Noise



Remote Control



Unipack Shipping

DAGNY

FINISH AND BLADE OPTIONS

| SKU# | DG-XX-XXXX (Model+Finish+Blade) | |
|---------------------------|---|--|
| Standard Finish | Textured Bronze Matte Black | TB BK |
| Blade Styles and Material | Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage | WDBW WD WDBK MTL MSAF |

TECHNICAL SPECS

| | |
|---|--|
| Fan Weight | 22 lbs |
| Voltage | 110 (Contact us for 220 conversion) |
| Motor Type | AC |
| Rotation | Yes |
| Downrods Lengths <i>Field cuttable, Non-Threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Overall Drop | 14 inches / 36 cm + downrod length |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Head Options | Solid Wood | Metal with Guard |
|--------------------|--------------------|-----------------------------------|
| Fan Diameter | 41 inches / 104 cm | 39 inches / 99 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Safety Cage or Decorative Cage |
| RPM (Low / High) | 1012 / 1445 | 1035 / 1448 |
| CFM (Low / High) | 2565 / 4168 | 2199 / 3169 |
| Watts (High) | 87.26 | 80.69 |
| CFM/Watt (High) | 50 | 42 |
| Blade Pitch | 19° | 31° |

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm


Vaulted ceiling canopy for up to 29°

Black 3-speed RF remote control with reverse



ACCESSORY

Decora-style, 3-speed, non-dimmable wall control

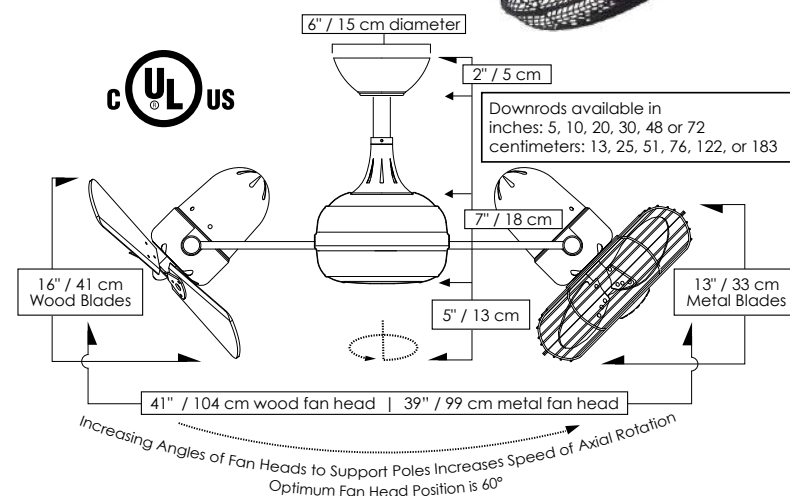



shown in Brushed Nickel
with Mahogany blades



shown in Brushed Nickel
with Barn Wood Blades



shown in Textured Bronze
with Metal Blades and
Decorative Cage



shown in Textured Bronze
with Barn Wood Blades



shown in Matte Black
with Matte Black Blades

Dagny LK



With clean, fluid lines, the Dagny LK 360° rotational fan is a striking centerpiece in any space. Its movement about its cylindrical center housing is smooth and quiet. Dagny LK's dual fan heads can be infinitely positioned in 180-degree arcs for optimum and customized air movement. As the angle between the fan heads and the horizontal support rods is increased, so does the speed of Dagny LK's axial rotation. Matthews rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed from cast aluminum and heavy stamped steel, the Dagny LK carries a limited lifetime warranty. This model is also available without a light kit as the **Dagny**.

Product Features

American Labor

AC Motor

360° Rotation

Safety Cage Compatible


Damp Location

Soothing White Noise

LED Lamp

Remote Control

Unipack Shipping

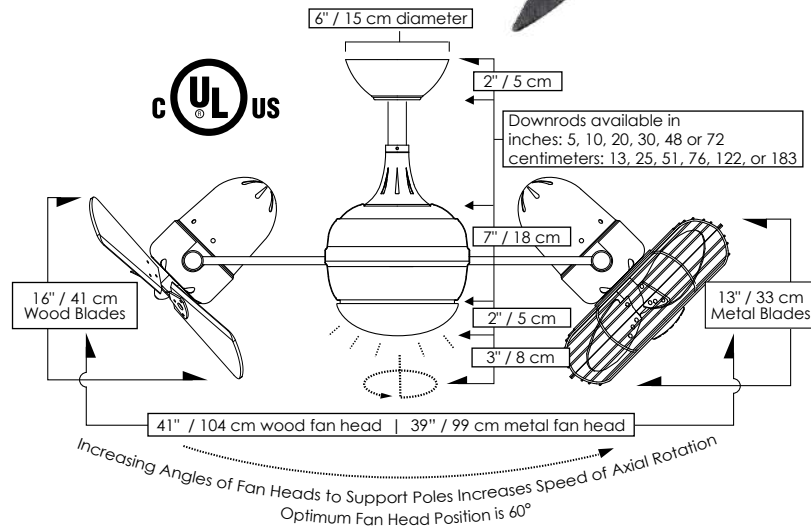

DAGNY LK

FINISH AND BLADE OPTIONS

| SKU# | DGLK-XX-XXXX (Model+Finish+Blade) | |
|---------------------------|--|---------------------------|
| Standard Finishes | Brushed Nickel | BN |
| | Matte Black | BK |
| | Textured Bronze | TB |
| Blade Styles and Material | Solid Wood / Barn Wood | WDBW |
| | Solid Wood / Mahogany | WD |
| | Solid Wood / Matte Black | WDBK |
| | Metal w/ Decorative Cage Metal w/ Safety Cage | MTL MSAF |

TECHNICAL SPECS

| | |
|---|--|
| Overall Drop | 14 inches / 41 cm + downrod length |
| Fan Weight | 22 lbs |
| Voltage | 110 (Contact us for 220 conversion) |
| Motor Type | AC |
| Rotation | Yes |
| Downrods Lengths <i>Field cuttable, Non-Threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Head Options | Solid Wood | Metal with Guard |
|--------------------|--------------------|-----------------------------------|
| Fan Diameter | 41 inches / 104 cm | 39 inches / 99 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Safety Cage or Decorative Cage |
| RPM (Low / High) | 757 / 1256 | 1069 / 1442 |
| CFM (Low / High) | 2557 / 4171 | 1844 / 3067 |
| Watts (High) | 87.36 | 80.50 |
| CFM/Watt (High) | 50 | 39 |
| Blade Pitch | 19° | 31° |

LIGHT KIT PHOTOMETRICS

| | |
|----------------------------|----------------|
| Lamping (Replaceable) | Integrated LED |
| Remote Dimmable | Yes |
| Delivered Temperature in K | 2969 |
| Delivered Lumens | 523.7 |
| CRI | 90 |
| Watts | 18 |
| Hours | 50,000 |

Light kit longevity if used 6 Hours/Day: 22.8 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 29°

Black 3-speed RF remote control with reverse



ACCESSORY

Decora-style, 3-speed, non-dimmable wall control





Dana



Both ceiling fan and LED pendant, Dana is our most versatile fixture. Her diminutive blades and LED light kit are concealed by intricate, organically inspired metal work finished in Matte Black, Matte White, Brushed Bronze, or Brushed Brass. Constructed of cast aluminum and heavy stamped steel, the Dana carries a limited lifetime warranty.

Product Features


AC Motor


Damp Location


Soothing White Noise



LED Lamp




Dimmable Lamp


Remote Control


Wall Control

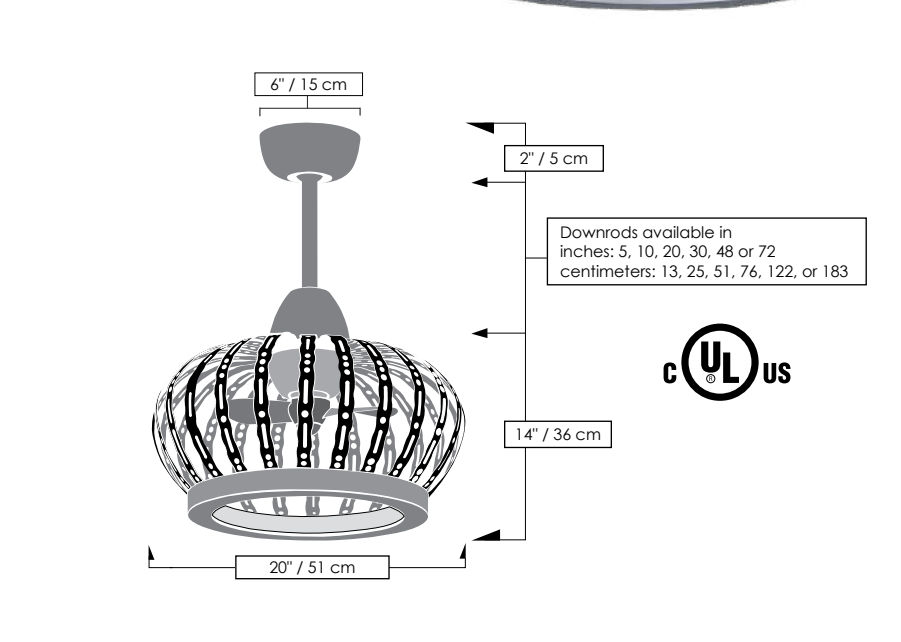
Unipack Shipping



| DANA | | |
|--|---|------|
| FINISH AND BLADE OPTIONS | | |
| SKU# | DM-XXXX (Model+Finish) | |
| Standard Finishes | Brushed Brass | BRBR |
| | Brushed Bronze | BB |
| | Matte Black | BK |
| | Matte White | MWH |
| TECHNICAL SPECS | | |
| Fan Diameter | 20 inches / 51 cm | |
| Blade Material | Rubber | |
| Overall Drop | 16 inches / 41 cm + downrod length | |
| Fan Weight | 23 lbs | |
| Voltage | 110 or 220 | |
| Motor Type | AC | |
| Downrods Lengths <i>Field cuttable, Non-Threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 | |
| Downrod Diameter | 1 inch | |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible | |
| Ambience | Soothing White Noise | |
| Safety Certification | UL / CUL | |
| Warranty | Limited Lifetime | |
| NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA | | |
| RPM (Low / High) | 1095 / 1666 | |
| CFM (Low / High) | 691 / 1100 | |
| Watts (High) | 32 | |
| CFM/Watt (High) | 42 | |
| Blade Pitch | 31° | |
| LIGHT KIT PHOTOMETRICS | | |
| Lamping (Replaceable) | Integrated LED | |
| Remote Dimmable | Yes | |
| Delivered Temperature in K | 2923 | |
| Delivered Lumens | 578 | |
| CRI | 93.8 | |
| Watts | 24 | |
| Hours | 49,000 | |
| Light kit longevity if used 6 Hours/Day: 22.4 Years | | |
| STANDARD EQUIPMENT | | |
| One downrod of 10 inches / 25 cm | | |
| Vaulted ceiling canopy for up to 29° | | |
| Light cover | | |
| <div>Black 3-speed RF remote control with reverse</div> <div></div> | <div>ACCESSORY</div> <div>Decora-style, 3-speed, non-dimmable wall control</div> <div></div> | |



shown in Brushed Nickel with Metal blades and Decorative Cage



Diane



The Diane directional fan head provides maximum airflow with a sweeping 90° forward and reverse oscillation. The Diane can be hung in small, awkward spaces or in front of HVAC ducts to improve the efficiency of heating, ventilation or air conditioning of any space. Constructed of cast aluminum and heavy stamped steel, the Diane carries a limited lifetime warranty.

Product Features



American Labor



AC Motor



90° Oscillation



Safety Cage Compatible



Damp Location



Soothing White Noise



Remote Control



Unipack Shipping

shown in Textured Bronze with Mahogany blades



shown in Textured Bronze with Metal blades and Decorative Cage


shown in Matte Black with Matte Black blades



shown in Polished Chrome with Metal blades and Decorative Cage



shown in Polished Chrome with Barn Wood blades

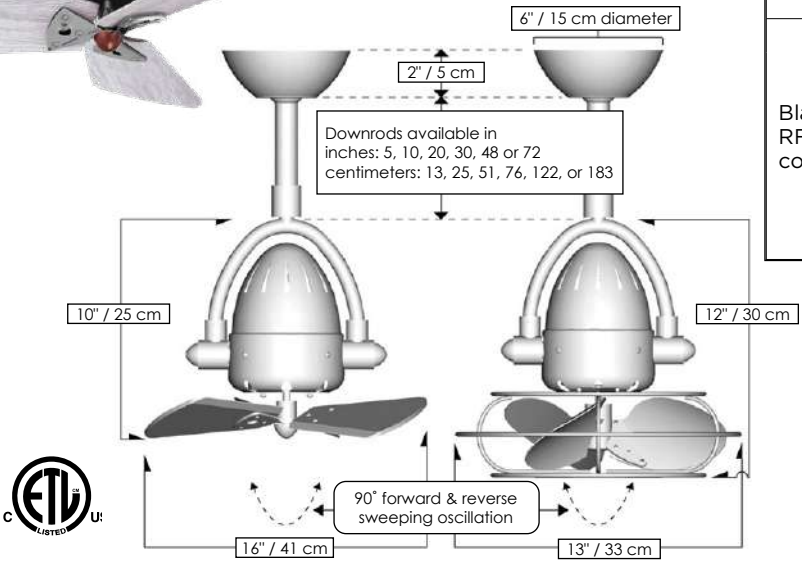

DIANE

FINISH AND BLADE OPTIONS

| SKU# | DI-XX-XXXX (Model+Finish+Blade) | |
|---------------------------|------------------------------------|-------------|
| Standard Finishes | Brushed Nickel | BN |
| | Matte Black | BK |
| | Polished Chrome | CR |
| | Textured Bronze | TB |
| Blade Styles and Material | Solid Wood/Barn Wood | WDBW |
| | Solid Wood/Mahogany | WD |
| | Solid Wood/Matte Black | WDBK |
| | Metal w/ Decorative Cage | MTL |
| | Metal w/ Safety Cage | MSAF |

TECHNICAL SPECS

| | | |
|---|--------------|---|
| Fan Weight | | 12 lbs |
| Voltage | | 110 or 220 |
| Motor Type | | AC |
| Oscillation | | Yes |
| Downrods Lengths <i>Field cuttable.</i> <i>Non-threaded</i> | | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | | 1 inch |
| Overall Drop | Metal Blades | 14 inches / 36 cm + downrod length |
| | Wood Blades | 12 inches / 30 cm + downrod length |
| Environment | | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | | Soothing White Noise |
| Safety Certification | | ETL / CETL |
| Warranty | | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Head Options | Solid Wood | Metal with Guard |
|--------------------|-------------------|--------------------------------|
| Fan Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Decorative Cage or Safety Cage |
| RPM (Low / High) | 865 / 1325 | 900 / 1377 |
| CFM (Low / High) | 1441 / 2152 | 1068 / 1345 |
| Watts (High) | 51.37 | 46.14 |
| CFM/Watt (High) | 44 | 31 |
| Blade Pitch | 19° | 31° |

STANDARD EQUIPMENT

- One downrod of 10 inches / 25 cm
- Vaulted ceiling canopy for up to 29°

ACCESSORY

Black 3-speed RF remote control



Decora-style, 3-speed wall control in white





shown in Gloss White
with Barn Wood blades

COASTAL WET LOCATION
100% 316 MARINE GRADE STAINLESS STEEL



Donaire



With teardrop motor housing, the 52" Donaire 316 marine grade stainless steel coastal wet location ceiling fan is transitional in design. Donaire is finished in brushed bronze, brushed stainless, or gloss white, equipped with all weather blades and 16W LED dimmable light kit with optional metal cover. Constructed of entirely 316 marine grade stainless steel, the Donaire carries a limited lifetime warranty.

Product Features

AC Motor

Coastal Environment

Wet Location

Silent

LED Lamp

Dimmable Lamp

Remote Control

Unipack Shipping

shown in Brushed Bronze with Brushed Bronze blades and optional metal cover

shown in Brushed Stainless with Barn Wood blades and optional metal cover

shown in Matte Black with Black blades and optional metal cover

shown in Gloss White with Gloss White blade

shown in Brushed Stainless with Brushed Stainless blades

6" / 15 cm diameter

2" / 5 cm

Downrods available in inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183

6" / 15 cm



6.5" / 17 cm

Blade Pitch 14°

10" / 25 cm

52" / 132 cm

cULus

| DONAIRE | | |
|---|---|----|
| FINISH AND BLADE OPTIONS | | |
| SKU# | DA-XX-XX (Model+Finish+Blade) | |
| Standard Finishes | Matte Black | BK |
| | Brushed Bronze | BB |
| | Brushed Stainless | BS |
| | Gloss White | WH |
| Blade Finish | Black | BK |
| | Barn Wood Tone | BW |
| | Brushed Bronze | BB |
| | Brushed Stainless | BS |
| | Gloss White | WH |
| TECHNICAL SPECS | | |
| Fan Diameter | 52 inches / 132 cm | |
| Blade Material | ABS | |
| Overall Drop | 8.5 inches / 22 cm + downrod length | |
| Fan Weight | 29 lbs | |
| Voltage | 110 or 220 | |
| Motor Type | AC | |
| Downrods Lengths <i>Field cuttable, Non-Threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 | |
| Downrod Diameter | 1 inch | |
| Environment | Coastal and wet locations All weather blade system | |
| Ambience | Silent | |
| Safety Certification | UL / CUL | |
| Warranty | Limited Lifetime | |
| NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA | | |
| RPM (Low / High) | 55 / 172 | |
| CFM (Low / High) | 1775 / 6013 | |
| Watts (High) | 58.62 | |
| CFM/Watt (High) | 111 | |
| Blade Pitch | 14° | |
| LIGHT KIT PHOTOMETRICS | | |
| Lamping (Replaceable) | Integrated LED | |
| Remote Dimmable | Yes | |
| Delivered Temperature in K | 3017 | |
| Delivered Lumens | 725 | |
| CRI | 90 | |
| Watts | 16 | |
| Hours | 60,000 | |
| Light kit longevity if used 6 Hours/Day: 27.4 Years | | |
| STANDARD EQUIPMENT | | |
| One downrod of 10 inches / 25 cm | | |
| Vaulted ceiling canopy for up to 29° | | |
| Light cover | | |
|  Black 3-speed RF remote control with reverse | ACCESSORY | |
| |  Decora-style, 3-speed, non-dimmable wall control | |

Blade Options

Black

Brushed Bronze

Brushed Stainless

Barn Wood

Gloss White



shown in Matte Black with Matte Black blades

Eliza *Geometry in Motion*



Designed by Chicago architect Stephen Katz in 2013, the wet location Eliza blends a beautiful technically derived form with superior function and movement. The unique blade shape is designed to maximize air movement at the outer edge of the blade. The result is more efficient air velocity rings, less blade drag and greater motor optimization. Equally important is Eliza's stationary visual statement which combines modern utility with minimalist geometry. Constructed of cast aluminum and heavy stamped steel, the Eliza has a limited lifetime warranty.

Product Features

DC Motor

Wet Location

Silent

Remote Control

Wall Control

Unipack Shipping



shown in Gloss White with Gloss White blades


shown in Gloss White with Walnut blades

shown in Matte Black with Old Oak blades

shown in Gloss White with Barn Wood blades

shown in Brushed Nickel with Gray Ash blades

shown in Brushed Nickel with Brushed Nickel blades

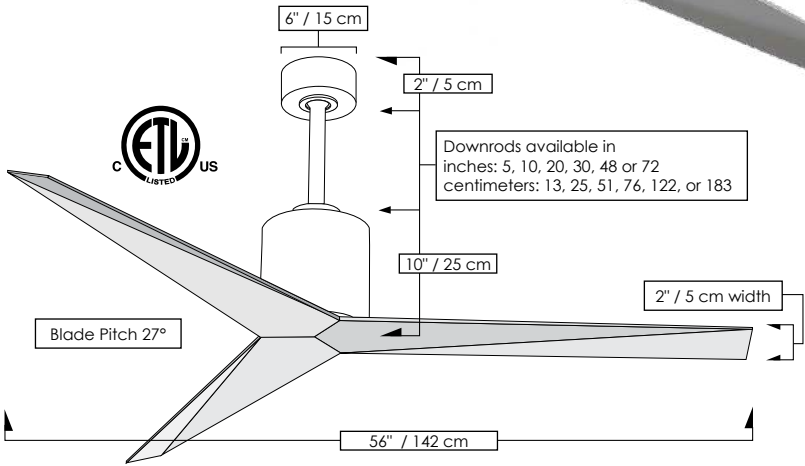

ELIZA

FINISH AND BLADE OPTIONS

| SKU# | EK-XX-XX (Model+Finish+Blade) | |
|-------------------|----------------------------------|----|
| Standard Finishes | Brushed Nickel | BN |
| | Gloss White | WH |
| Blade Finish | Matte Black | BK |
| | Barn Wood | BW |
| | Brushed Nickel | BN |
| | Gloss White | WH |
| | Gray Ash | GA |
| | Matte Black | BK |
| | Old Oak | OO |
| | Walnut | WN |

TECHNICAL SPECS

| | |
|---|---|
| Fan Diameter | 56 inches / 142 cm |
| Blade Material | ABS |
| Overall Drop | 12 inches / 30 cm + downrod length |
| Fan Weight | 17 lbs |
| Voltage | 110 or 220 |
| Motor Type | DC |
| Downrods Lengths <i>Field cuttable, non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Environment | Wet locations for all finishes All weather blade system. Neither coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| | |
|------------------|-------------|
| RPM (Low / High) | 55 / 172 |
| CFM (Low / High) | 1633 / 5439 |
| Watts (High) | 33.13 |
| CFM/Watt (High) | 167 |
| Blade Pitch | 27° |

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse

White wireless Decora-style, 6-speed, wall control with reverse

NOTE: Only compatible with included controllers.

Blade Options

Barn Wood

Gray Ash

Old Oak

Walnut

Brushed Nickel

Matte Black

Gloss White



Eliza-H *Geometry in Motion*



Designed by Chicago architect Stephen Katz in 2014, the Eliza-H ceiling-mount fan blends a beautiful technically derived form with superior function and movement. The unique blade shape is designed to maximize air movement at the outer edge of the blade. The result is more efficient air velocity rings, less blade drag and greater motor optimization. Equally important is Eliza-H's stationary visual statement which combines modern utility with minimalist geometry. Constructed of cast aluminum and heavy stamped steel, the Eliza-H has a limited lifetime warranty.

Product Features



DC Motor



Damp Location



Silent




Remote Control



Wall Control



Unipack Shipping

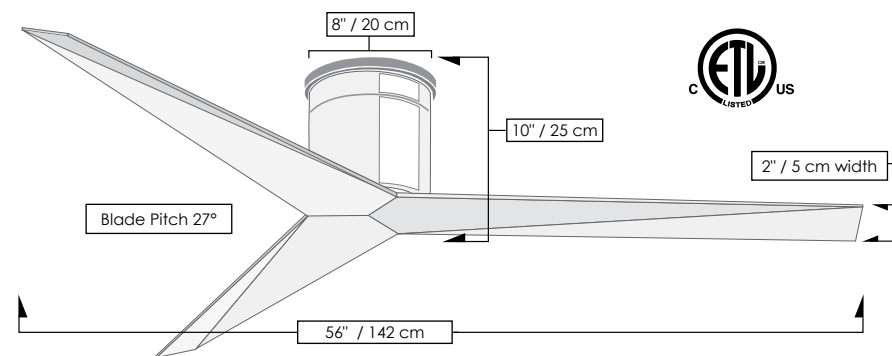

ELIZA-H

FINISH AND BLADE OPTIONS

| SKU# | EKH-XX-XX (Model+Finish+Blade) | |
|-------------------|-----------------------------------|----|
| Standard Finishes | Brushed Nickel | BN |
| | Gloss White | WH |
| | Matte Black | BK |
| Blade Finish | Barn Wood | BW |
| | Brushed Nickel | BN |
| | Gloss White | WH |
| | Gray Ash | GA |
| | Matte Black | BK |
| | Old Oak | OO |
| | Walnut | WN |

TECHNICAL SPECS

| | |
|----------------------|---|
| Fan Diameter | 56 inches / 142 cm |
| Blade Material | ABS |
| Overall Drop | 10 inches / 25 cm |
| Fan Weight | 14 lbs |
| Voltage | 110 or 220 |
| Motor Type | DC |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA


| | |
|------------------|-------------|
| RPM (Low / High) | 52 / 175 |
| CFM (Low / High) | 1123 / 4034 |
| Watts (High) | 33.49 |
| CFM/Watt (High) | 122 |
| Blade Pitch | 27° |

STANDARD EQUIPMENT

| | |
|--|---|
| Black 6-speed RF remote control with reverse | White wireless Decora-style, 6-speed, wall control with reverse |
|--|---|

NOTE: Only compatible with included controllers.

Blade Options

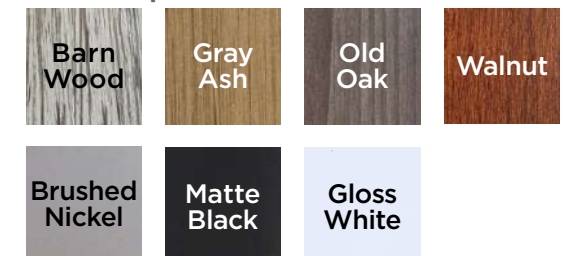



shown in Matte Black
with 52" Matte Black blades




shown in Matte Black
with 60" Matte White blades



shown in Textured Bronze
with 42" Barn Wood blades



shown in Matte Black
with 52" Walnut blades

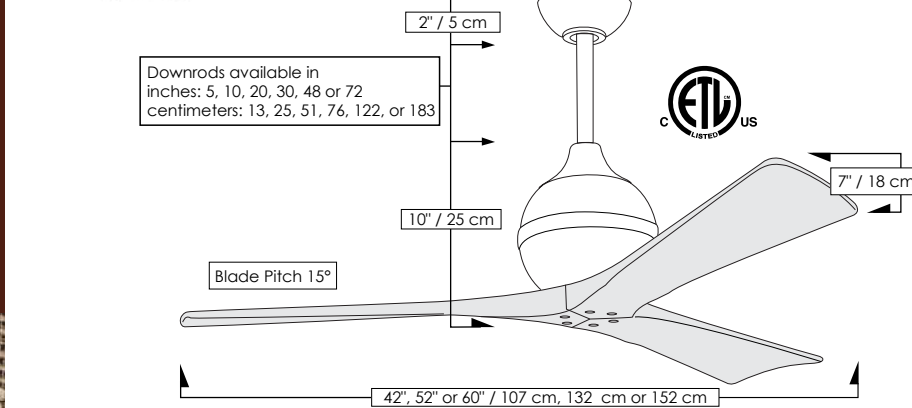

Downrods available in
inches: 5, 10, 20, 30, 48 or 72
centimeters: 13, 25, 51, 76, 122, or 183



Irene-3



The Irene-3 is rustic, yet strikingly modern with three neatly joined, solid matte black, matte white, walnut, or barn wood tone blades. A spherical motor housing complements its minimal profile. Irene-3 is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3 has a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control



Wall
Control

IRENE-3

FINISH AND BLADE OPTIONS

| SKU# | IR3-XX-XXX-XX (Model+Finish+Blade+Diameter) | |
|----------------------|--|------------|
| Standard Finishes | Matte Black | BK |
| | Textured Bronze | TB |
| Blade Finishes | Barn Wood Tone | BW |
| | Gray Ash | GA |
| | Light Maple | LM |
| | Matte Black | BK |
| | Matte White | MWH |
| | Walnut Tone | WA |
| Fan Diameter | 42 inches / 107 cm | 42 |
| | 52 inches / 132 cm | 52 |
| | 60 inches / 152 cm | 60 |

TECHNICAL SPECS

| | |
|---|--|
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 |
| Blade Material | CNC Cut Solid Wood |
| Overall Drop | 12 inches / 30 cm + downrod length |
| Fan Weight | 17 lbs |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Voltage | 110 or 220 |
| Motor Type | DC |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
|------------------|---------------------|---------------------|---------------------|
| RPM (Low / High) | 52 / 231 | 51 / 196 | 52 / 160 |
| CFM (Low / High) | 541 / 3517 | 1531 / 6168 | 2088 / 6984 |
| Watts (High) | 17.08 | 32.12 | 31.67 |
| CFM/Watt (High) | 163 | 185 | 218 |
| Blade Pitch | 15° | 15° | 15° |

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF
remote control
with reverse



White wireless
Decora-style,
6-speed, wall
control with
reverse



NOTE: Only compatible with included controllers.

Blade Options





shown in Gloss White
with 42" Barn Wood blades



Irene-3H



The Irene-3H ceiling-mount fan is rustic, yet strikingly modern with three neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-3H is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3H has a limited lifetime warranty.

Product Features

DC Motor

Damp Location

Silent

Remote Control

Wall Control



shown in Polished Chrome
with 52" Barn Wood blades

shown in
Textured Bronze with
42" Walnut blades

shown in
Brushed Bronze with
42" Barn Wood blades

shown in
Matte Black with
42" Matte Black blades

shown in
Brushed Bronze with
60" Matte White blades


shown in Brushed Nickel
with 42" Gray Ash blades

shown in Barn Wood
with 60" Light Maple blades

shown in
Light Maple with
42" Walnut blades

shown in
Walnut with
42" Walnut blades

shown in
Brushed Pewter
with 42" Walnut
blades

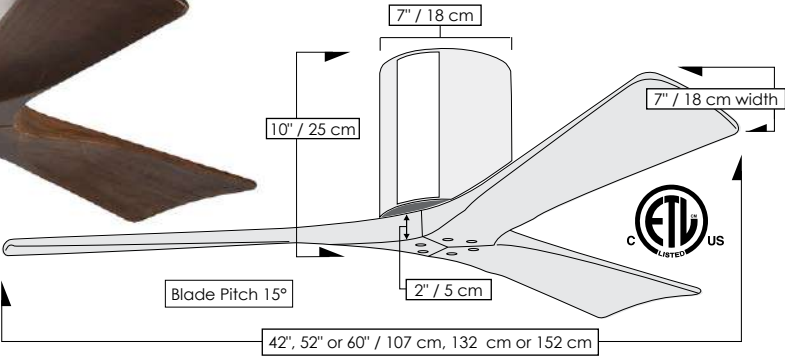

IRENE-3H

FINISH AND BLADE OPTIONS

| SKU# | IR3H-XXXX-XXX-XX (Model+Finish+Blade+Diameter) | |
|-------------------|---|------|
| Standard Finishes | Barn Wood | BW |
| | Brushed Brass | BRBR |
| | Brushed Bronze | BB |
| | Brushed Nickel | BN |
| | Brushed Pewter | BP |
| | Gloss White | WH |
| | Light Maple | LM |
| | Matte Black | BK |
| | Polished Chrome | CR |
| | Textured Bronze | TB |
| Blade Finishes | Walnut | WN |
| | Barn Wood Tone | BW |
| | Gray Ash | GA |
| | Light Maple | LM |
| | Matte Black | BK |
| Fan Diameter | Matte White | MWH |
| | Walnut Tone | WA |
| | 42 inches / 107 cm | 42 |
| | 52 inches / 132 cm | 52 |
| | 60 inches / 152 cm | 60 |

TECHNICAL SPECS

| | |
|----------------------|--|
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 |
| Blade Material | CNC Cut Solid Wood |
| Overall Drop | 10 inches / 25 cm |
| Fan Weight | 11 lbs |
| Voltage | 110 or 220 |
| Motor Type | DC |
| Environment | Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible. |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
|-----------------|---------------------|---------------------|---------------------|
| RPM (Low /High) | 51 / 231 | 51 / 193 | 52 / 155 |
| CFM (Low /High) | 746 / 3743 | 1254 / 5326 | 1755 / 5720 |
| Watts (High) | 17.61 | 32.38 | 32.08 |
| CFM/Watt (High) | 176 | 160 | 181 |
| Blade Pitch | 15° | 15° | 15° |


STANDARD EQUIPMENT

Black 6-speed RF remote control with reverse

White wireless Decora-style, 6-speed, wall control with reverse

NOTE: Only compatible with included controllers.

Blade Options

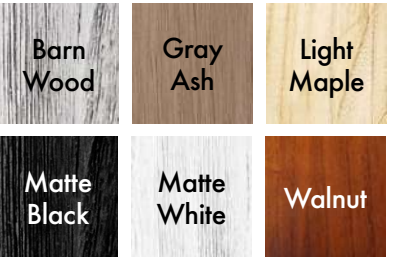



shown in Brushed Brass
with 52" Walnut blades



Irene-3HLK

The Irene-3HLK ceiling-mount fan is rustic, yet strikingly modern with three neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-3HLK is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3HLK has a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



LED
Lamp



Dimmable
Lamp



Remote
Control



Wall
Control



shown in Gloss White
with 60" Matte White blades

shown in Matte Black
with 52" Matte Black blades

shown in
Brushed Nickel with
52" Barn Wood
blades

shown in
Textured Bronze
with 60" Walnut
blades

shown in
Brushed Pewter with
42" Matte White
blades


shown in
Brushed Bronze
with 52" Barn
Wood blades

shown in
Walnut with 42"
Walnut blades

shown in
Light Maple with
42" Walnut
blades

shown in
Polished Chrome with
42" Matte Black
blades

shown in
Barn Wood with
42" Barn Wood
blades

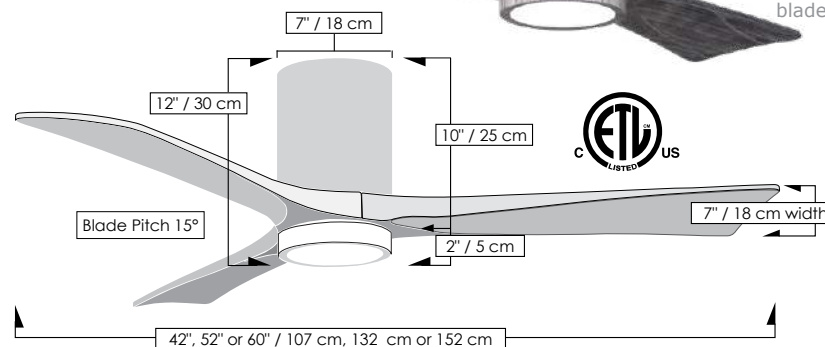

IRENE-3HLK

FINISH AND BLADE OPTIONS

| SKU# | IR3HLK-XXXX-XXX-XX (Model+Finish+Blade+Diameter) | |
|-------------------|---|------|
| Standard Finishes | Barn Wood | BW |
| | Brushed Brass | BRBR |
| | Brushed Bronze | BB |
| | Brushed Nickel | BN |
| | Brushed Pewter | BP |
| | Light Maple | LM |
| | Gloss White | WH |
| | Matte Black | BK |
| | Polished Chrome | CR |
| | Textured Bronze | TB |
| Blade Finishes | Walnut | WN |
| | Barn Wood Tone | BW |
| | Matte Black | BK |
| | Matte White | MWH |
| Fan Diameter | Walnut Tone | WA |
| | 42 inches / 107 cm | 42 |
| | 52 inches / 132 cm | 52 |
| | 60 inches / 152 cm | 60 |

TECHNICAL SPECS

| | |
|----------------------|--|
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 |
| Blade Material | CNC Cut Solid Wood |
| Overall Drop | 12 inches / 30 cm |
| Fan Weight | 12 lbs |
| Voltage | 110 or 220 |
| Motor Type | DC |
| Environment | Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible. |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
|------------------|---------------------|---------------------|---------------------|
| RPM (Low / High) | 50 / 232 | 51 / 212 | 51 / 152 |
| CFM (Low / High) | 701 / 3573 | 1057 / 5047 | 1783 / 5878 |
| Watts (High) | 17.61 | 32.49 | 30.81 |
| CFM/Watt (High) | 168 | 149 | 191 |
| Blade Pitch | 15° | 15° | 15° |

LIGHT KIT PHOTOMETRICS

| Lamping (Replaceable) | Integrated LED |
|----------------------------|----------------|
| Remote Dimmable | Yes |
| Delivered Temperature in K | 3075 |
| Delivered Lumens | 690 |
| CRI | 90 |
| Watts | 16 |
| Hours | 60,000 |

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

Light Cover

Black 6-speed RF
remote control
with reverse



White wireless
Decora-style,
6-speed, wall
control with
reverse



NOTE: Only compatible with included controllers.

Blade Options





Irene-5



shown in Matte Black
with 60" Barn Wood blades



The Irene-5 is rustic, yet strikingly modern with five neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A spherical motor housing complements its minimal profile. Irene-5 is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5 has a limited lifetime warranty.

Product Features

DC Motor

Damp Location

Silent

Remote Control

Wall Control




shown in Matte Black
with 42" Gray Ash blades

shown in Matte Black
with 42" Light Maple blades

shown in Textured Bronze
with 52" Matte White blades

shown in Textured Bronze
with 52" Walnut blades

shown in Textured Bronze
with 42" Matte Black blades

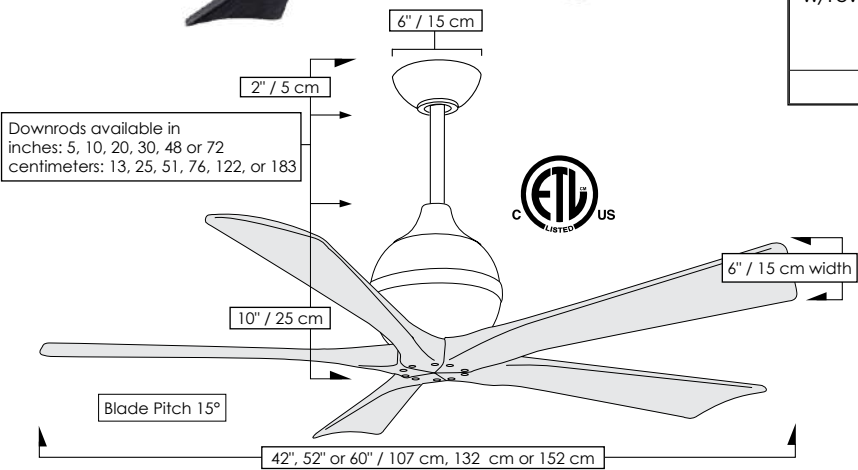


Downrods available in
inches: 5, 10, 20, 30, 48 or 72
centimeters: 13, 25, 51, 76, 122, or 183



| IRENE-5 | | | |
|---|--|---------------------|---------------------|
| FINISH AND BLADE OPTIONS | | | |
| SKU# | IR5-XX-XXX-XX (Model+Finish+Blade+Diameter) | | |
| Standard Finishes | Matte Black | BK | |
| | Textured Bronze | TB | |
| Blade Finishes | Barn Wood Tone | BW | |
| | Gray Ash | GA | |
| | Light Maple | LM | |
| | Matte Black | BK | |
| | Matte White | MWH | |
| | Walnut Tone | WA | |
| Fan Diameter | 42 inches / 107 cm | 42 | |
| | 52 inches / 132 cm | 52 | |
| | 60 inches / 152 cm | 60 | |
| TECHNICAL SPECS | | | |
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 | | |
| Blade Material | CNC Cut Solid Wood | | |
| Overall Drop | 12 inches / 30 cm + downrod length | | |
| Fan Weight | 18 lbs | | |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 | | |
| Downrod Diameter | 1 inch | | |
| Voltage | 110 or 220 | | |
| Motor Type | DC | | |
| Environment | Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible. | | |
| Ambience | Silent | | |
| Safety Certification | ETL / CETL | | |
| Warranty | Limited Lifetime | | |
| NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA | | | |
| Fan Diameter | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
| RPM (Low /High) | 52 / 229 | 51 / 156 | 52 / 77 |
| CFM (Low /High) | 852 / 4261 | 1784 / 5783 | 3328 / 5006 |
| Watts (High) | 25.33 | 32.18 | 31.38 |
| CFM/Watt (High) | 150 | 179 | 175 |
| Blade Pitch | 15° | 15° | 15° |
| STANDARD EQUIPMENT | | | |
| One downrod of 10 inches / 25 cm | | | |
| Vaulted ceiling canopy for up to 30° | | | |
| 6-speed RF remote control w/reverse in black | Wireless Decora-style, 6-speed, wall control in white | | |
| | | | |
| NOTE: Only compatible with included controllers. | | | |

Blade Options

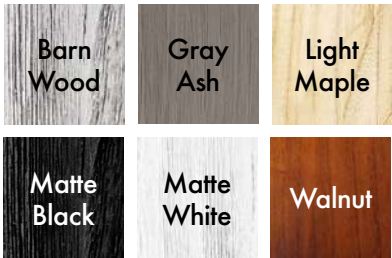



shown in Brushed Pewter with 60" Gray Ash blades



Irene-5H

The Irene-5H ceiling-mount fan is rustic, yet strikingly modern with five neatly joined, solid wood, matte black, matte white, gray ash, light maple, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-5H is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5H has a limited lifetime warranty.

Product Features

DC Motor

Damp Location

Silent

Remote Control

Wall Control



Blade Options

Barn Wood


Gray Ash


Light Maple

Matte Black

Matte White

Walnut

| IRENE-5H | | | |
|---|--|---|---------------------|
| FINISH AND BLADE OPTIONS | | | |
| SKU# | IR5H-XXXX-XXX-XX (Model+Finish+Blade+Diameter) | | |
| Standard Finishes | Barn Wood | BW | |
| | Brushed Brass | BRBR | |
| | Brushed Bronze | BB | |
| | Brushed Nickel | BN | |
| | Brushed Pewter | BP | |
| | Gloss White | WH | |
| | Light Maple | LM | |
| | Matte Black | BK | |
| | Polished Chrome | CR | |
| | Textured Bronze | TB | |
| Walnut | WN | | |
| Blade Finishes | Barn Wood Tone | BW | |
| | Gray Ash | GA | |
| | Light Maple | LM | |
| | Matte Black | BK | |
| | Matte White | MWH | |
| Walnut Tone | WA | | |
| Fan Diameter | 42 inches / 107 cm | 42 | |
| | 52 inches / 132 cm | 52 | |
| | 60 inches / 152 cm | 60 | |
| TECHNICAL SPECS | | | |
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 | | |
| Blade Material | CNC Cut Solid Wood | | |
| Overall Drop | 10 inches / 25 cm | | |
| Fan Weight | 12 lbs | | |
| Voltage | 110 or 220 | | |
| Motor Type | DC | | |
| Environment | Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible. | | |
| Ambience | Silent | | |
| Safety Certification | ETL / CETL | | |
| Warranty | Limited Lifetime | | |
| NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA | | | |
| Fan Diameter | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
| RPM (Low / High) | 51 / 226 | 51 / 151 | 51 / 78 |
| CFM (Low / High) | 855 / 3989 | 1631 / 4970 | 2201 / 3543 |
| Watts (High) | 25.76 | 31.46 | 31.58 |
| CFM/Watt (High) | 193 | 162 | 123 |
| Blade Pitch | 15° | 15° | 15° |
| STANDARD EQUIPMENT | | | |
| 6-speed RF remote control w/reverse in black | | Wireless Decora-style, 6-speed, wall control in white | |
|  | |  | |
| NOTE: Only compatible with included controllers. | | | |

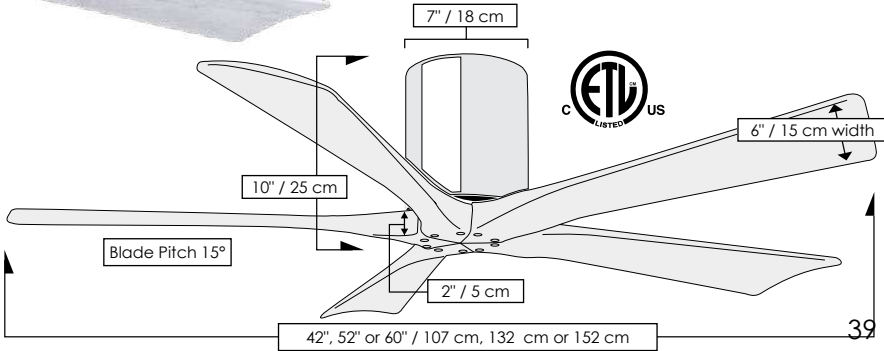



shown in Gloss White
with 60" walnut blades



Irene-5HLK



The Irene-5HLK ceiling-mount fan is rustic, yet strikingly modern with five neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-5HLK is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5HLK has a limited lifetime warranty.

Product Features

DC Motor

Damp Location

Silent

LED Lamp

Dimmable Lamp

Remote Control

Wall Control

shown in Brushed Bronze
with 42" Matte Black blades

shown in Matte Black
with 52" Matte Black blades

shown in
Brushed Pewter with
42" Matte Black blades

shown in
Textured Bronze
with 42" Walnut blades

shown in
Light Maple with 42"
Matte White
blades

shown in
Walnut with
42" Walnut blades

shown in Barn Wood
with 52" Matte White
blades

shown in
Brushed Brass with
42" Matte White blades

shown in Brushed Nickel
with 42" Barn Wood
blades

shown in Polished Chrome
with 60" Barn Wood blades

IRENE-5HLK

FINISH AND BLADE OPTIONS

| SKU# | IR5HLK-XXXX-XXX-XX (Model+Finish+Blade+Diameter) | |
|-------------------|---|-----|
| Standard Finishes | Barn Wood | BW |
| | Brushed Brass | BB |
| | Brushed Bronze | BN |
| | Brushed Nickel | BP |
| | Brushed Pewter | LM |
| | Light Maple | WH |
| | Gloss White | BK |
| | Matte Black | CR |
| | Polished Chrome | TB |
| | Textured Bronze | WN |
| Blade Finishes | Barn Wood Tone | BW |
| | Matte Black | BK |
| | Matte White | MWH |
| | Walnut Tone | WA |
| Fan Diameter | 42 inches / 107 cm | 42 |
| | 52 inches / 132 cm | 52 |
| | 60 inches / 152 cm | 60 |

TECHNICAL SPECS

| | |
|----------------------|--|
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 |
| Blade Material | CNC Cut Solid Wood |
| Overall Drop | 12 inches/30 cm |
| Fan Weight | 13 lbs |
| Voltage | 110 or 220 |
| Motor Type | DC |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
|-----------------|---------------------|---------------------|---------------------|
| RPM (Low /High) | 51 / 220 | 51 / 179 | 51 / 88 |
| CFM (Low /High) | 861 / 4215 | 1212 / 4749 | 2116 / 3660 |
| Watts (High) | 31.66 | 31.12 | 30.78 |
| CFM/Watt (High) | 127 | 150 | 132 |
| Blade Pitch | 15° | 15° | 15° |

LIGHT KIT PHOTOMETRICS

| Lamping (Replaceable) | Integrated LED |
|----------------------------|----------------|
| Remote Dimmable | Yes |
| Delivered Temperature in K | 3075 |
| Delivered Lumens | 690 |
| CRI | 90 |
| Watts | 16 |
| Hours | 60,000 |

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

Light Cover

6-speed RF
remote control
w/reverse in black



Wireless
Decora-style,
6-speed, wall
control in white



NOTE: Only compatible with included controllers.

Blade Options





Kaye

The beautiful Kaye 3-speed versatile-mount, wall or ceiling fan, oscillates left to right, forward and reverse, in a 90° sweep. Its design is reminiscent of vintage train cabin ventilators of yester-year, and will cool down your favorite space with poise and determination. Kaye's profile is low, however its strength and character define it. Kaye can be mounted in any small or awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of your favorite space. Constructed of cast aluminum and heavy stamped steel, the Kaye carries a limited lifetime warranty.

American Labor

AC Motor

90° Oscillation

Safety Cage Equipped

Ceiling Mount

Wall Mount

Damp Location

Soothing White Noise

Wall Control

Unipack Shipping

Product Features

KAYE

FINISH AND BLADE OPTIONS

| SKU# | KC-XX (Model+Finish) | |
|----------|-------------------------|----|
| Finishes | Brushed Nickel | BN |
| | Matte Black | BK |
| | Polished Chrome | CR |
| | Textured Bronze | TB |
| | Gloss White | WH |

TECHNICAL SPECS

| | |
|-----------------------------|---|
| Fan Weight | 10.5 lbs |
| Blade Material | Metal / ABS |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Oscillation | Yes |
| Fan Diameter | 13 inches / 33 cm |
| Fan Height | 13 inches / 33 cm |
| Fan Projection | 17.5 inches / 44 cm |
| Ceiling Mount Overall Drop | 17.5 inches / 44 cm |
| Recommended Mounting Height | Approximately 24 inches / 61 cm from ceiling |
| Fan Guard | Safety Cage |
| Blade Pitch | 31° |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Soothing White Noise |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| | |
|------------------|-------------|
| RPM (Low / High) | 1213 / 1445 |
| CFM (Low / High) | 868 / 1303 |
| Watts (High) | 47.68 |
| CFM/Watt (High) | 29 |
| Blade Pitch | 31° |

STANDARD EQUIPMENT

| | |
|---|--|
| Safety cage | |
| Side-mounted wall junction box | |
| <p>White Decora-style, 3-speed wall control</p> | ACCESSORY |
| | <p>Black 3-speed RF remote control</p> |

Note:
1) A three-wire system is needed to operate the oscillation mechanism independent of the fan blades.
2) The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.

42

43



shown in Textured Bronze



Laura



shown in Matte Black

The Laura 3-speed, left-to-right 90 degree oscillating wall fan offers the best in function. Its patented design boasts a whisper-quiet DC motor, remote control operation and easy 2-wire installation. Compact and powerful, Laura can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of heating, ventilation or air conditioning. Constructed of cast aluminum and heavy stamped steel, Laura carries a limited lifetime warranty.

Product Features

American Labor

110-240V DC Motor

90° Oscillation

Safety Cage Equipped

Damp Location


Soothing White Noise

Remote Control


Unipack Shipping




shown in Textured Bronze

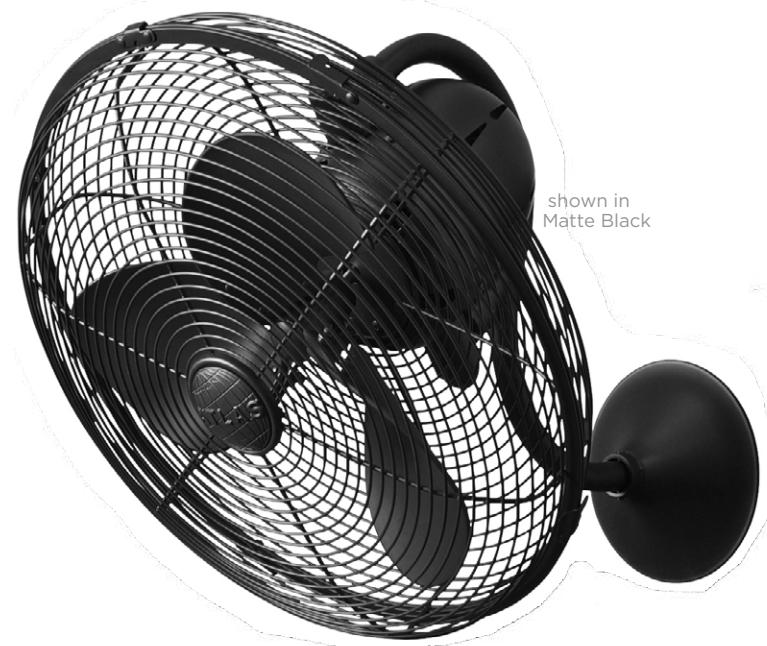

shown in Brushed Nickel

| LAURA | | |
|---|---|---|
| FINISH AND BLADE OPTIONS | | |
| SKU# | LL-XX (Model+Finish) | |
| Finishes | Brushed Nickel Matte Black Textured Bronze | BN BK TB |
| TECHNICAL SPECS | | |
| Fan Weight | 12 lbs | |
| Blade Material | Metal / ABS | |
| Voltage | 110 - 240 | |
| Motor Type | DC | |
| Oscillation | Yes | |
| Fan Diameter | 16 inches / 41 cm | |
| Fan Height | 14.5 inches / 37 cm | |
| Fan Projection | 19.5 inches / 50 cm | |
| Recommended Mounting Height | Approximately 24 inches / 61 cm from ceiling | |
| Fan Guard | Safety Cage | |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible | |
| Ambience | Soothing White Noise | |
| Safety Certification | UL / CUL | |
| Warranty | Limited Lifetime | |
| NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA | | |
| RPM (Low / High) | 1231 / 1520 | |
| CFM (Low / High) | 1056 / 1600 | |
| Watts (High) | 28.1 | |
| CFM/Watt (High) | 56.94 | |
| Blade Pitch | 31° | |
| STANDARD EQUIPMENT | | |
| Safety cage | |  |
| Side-mounted wall junction box | | |
| Black 3-speed RF remote control | | |
| Note: 1) Two-wire system required to operate the oscillation mechanism independent of the fan blades. Three-wire system not needed. 2) Receiver already hidden in motor canopy. | | |

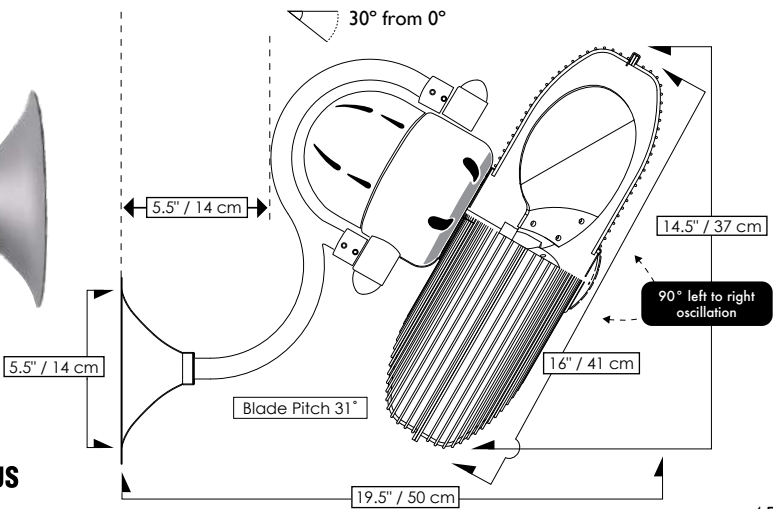



shown in Textured Bronze
with Walnut blades



shown in
Matte Black
with Matte Black blades



shown in
Textured Bronze
with Walnut blades



Lindsay



shown in Matte White
with Matte White blades



shown in Matte White
with Barn Wood blades

The Lindsay ceiling fan offers a simple, yet refined air flow solution to any space. The two elegant, solid wood blades quietly circulate air as they revolve around an understated central motor housing. Integrated into the design is an eco-friendly, dimmable LED light kit which will provide illumination for decades to come. The Lindsay is available in matte black, matte white and textured bronze finishes. Blade finish options are barn wood, matte black, matte white or walnut. Constructed of cast aluminum and heavy stamped steel, Lindsay carries a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



LED
Lamp



Dimmable
Lamp



Remote
Control



Wall
Control



Unipack
Shipping

LINDSAY

FINISH AND BLADE OPTIONS

| SKU# | LW-XXX-XXX (Model+Finish+Blade) | |
|----------------------|------------------------------------|-----|
| Standard Finishes | Matte Black | BK |
| | Matte White | MWH |
| | Textured Bronze | TB |
| Blade Finish | Barn Wood | BW |
| | Matte Black | BK |
| | Matte White | MWH |
| | Walnut | WN |

TECHNICAL SPECS

| | |
|----------------------|--|
| Fan Diameter | 52 inches / 132 cm |
| Blade Material | CNC Cut Solid Wood |
| Overall Drop | 12 inches / 30 cm |
| Fan Weight | 11 lbs |
| Voltage | 110 (Please contact us for 220V) |
| Motor Type | DC |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| | |
|------------------|-------------|
| RPM (Low / High) | 51 / 220 |
| CFM (Low / High) | 1097 / 4955 |
| Watts (High) | 29.61 |
| CFM/Watt (High) | 166 |
| Blade Pitch | 45° |

LIGHT KIT PHOTOMETRICS

| Lamping (Replaceable) | Integrated LED |
|----------------------------|----------------|
| Remote Dimmable | Yes |
| Delivered Temperature in K | 2940 |
| Delivered Lumens | 557 |
| CRI | 93.7 |
| Watts | 17 |
| Hours | 37,000 |

Light kit longevity if used 6 Hours/Day: 16.9 Years

STANDARD EQUIPMENT

Black 6-speed RF
remote control
with reverse





White wireless
Decora-style,
6-speed, wall
control



NOTE: Only compatible with included controllers.

Blade Options

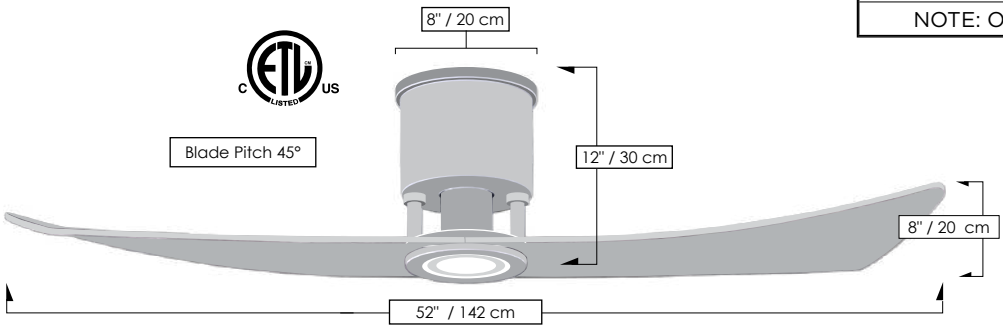



shown in Matte Black



Melody



The oscillating Melody, 3-speed wall-mounted fan, designed in the Art Nouveau style with a grand, arching gooseneck, provides maximum multi-directional airflow with its 90° left to right sweep. Melody can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of any space. Constructed of cast aluminum and heavy stamped steel, the Melody carries a limited lifetime warranty.

Product Features

American Labor

AC Motor

90° Oscillation

Safety Cage Equipped

Damp Location

Soothing White Noise

Wall Control


Unipack Shipping



shown in
Matte Black



shown in
Textured Bronze

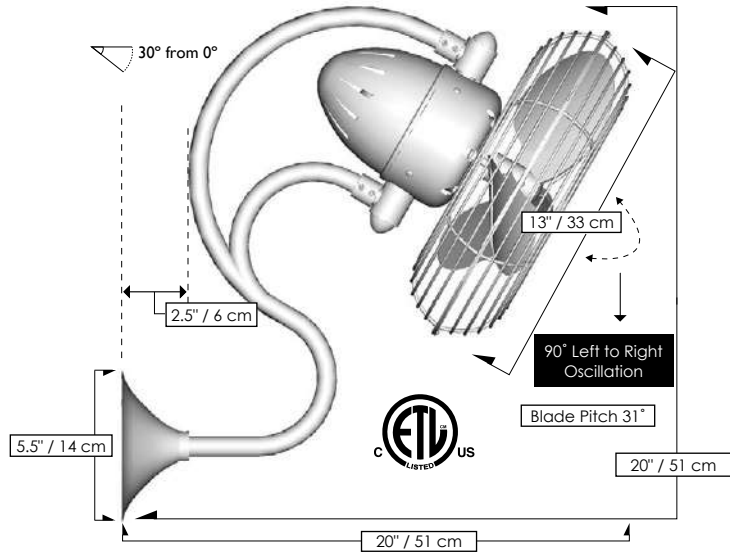

MELODY

FINISH AND BLADE OPTIONS

| SKU# | ME-XX (Model+Finish) | |
|----------|--------------------------------|----------|
| Finishes | Matte Black Textured Bronze | BK TB |

TECHNICAL SPECS

| | |
|-----------------------------|---|
| Fan Weight | 14 lbs |
| Blade Material | Metal / ABS |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Oscillation | Yes |
| Fan Diameter | 13 inches / 33 cm |
| Fan Height | 20 inches / 51 cm |
| Fan Projection | 20 inches / 51 cm |
| Recommended Mounting Height | Approximately 24 inches / 61 cm from ceiling |
| Fan Guard | Safety Cage |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Soothing White Noise |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| | |
|------------------|-------------|
| RPM (Low / High) | 1213 / 1495 |
| CFM (Low / High) | 868 / 1303 |
| Watts (High) | 47.68 |
| CFM/Watt (High) | 27.32 |
| Blade Pitch | 31° |

STANDARD EQUIPMENT

| | |
|--------------------------------|------------------|
| Safety cage | |
| Side-mounted wall junction box | |
| | ACCESSORY |
| | |

Note:
1) A three-wire system is needed to operate the oscillation mechanism independent of the fan blades.
2) The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.



Molly

Designed by Chicago architect Stephen Katz in 2018, the Molly ceiling fan combines modern organic geometry with outstanding performance and function. The blade shape was developed using advanced computer software which allowed the design to achieve a complex form. The result is a clean, natural and contemporary look perfect for any room or décor. Available in gloss white or matte black finish, Molly will complement a variety of design styles while also providing a fresh and unique, modern statement. Constructed of cast aluminum and heavy stamped steel, the Molly carries a limited lifetime warranty.

Product Features



DC Motor



Damp Location



Silent



Remote Control



Wall Control



Unipack Shipping



shown in Gloss White


Blade Options

Matte Black

Gloss White



shown in Matte Black

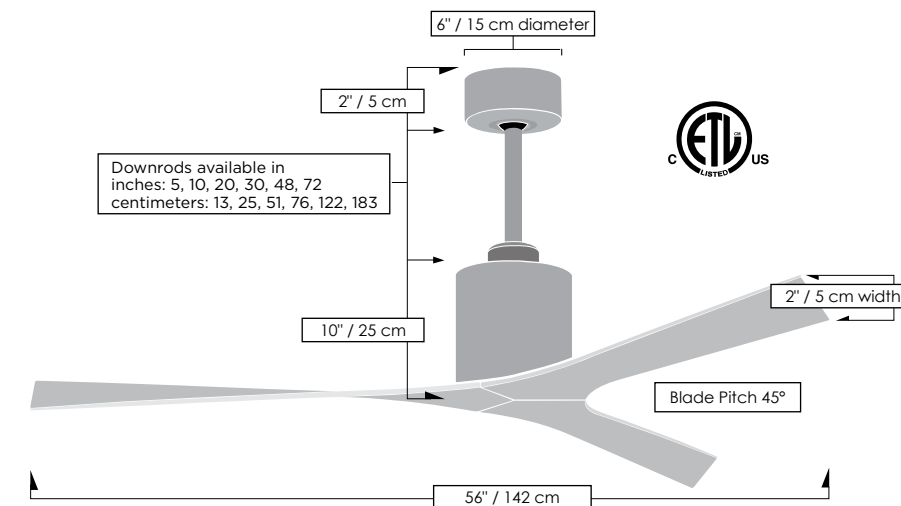

MOLLY

FINISH AND BLADE OPTIONS

| SKU# | MK-XX (Model+Finish) | |
|-------------------|-------------------------|----|
| Standard Finishes | Gloss White | WH |
| | Matte Black | BK |

TECHNICAL SPECS

| | |
|---|--|
| Fan Diameter | 56 inches / 142 cm |
| Blade Material | ABS |
| Overall Drop | 12 inches / 30 cm + downrod length |
| Fan Weight | 17 lbs |
| Voltage | 110 (Please contact us for 220V) |
| Motor Type | DC |
| Downrods Lengths <i>Field cuttable, non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Environment | Wet locations for all finishes All weather blade system. Neither coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| | |
|------------------|-------------|
| RPM (Low / High) | 49 / 116 |
| CFM (Low / High) | 1556 / 3530 |
| Watts (High) | 29.96 |
| CFM/Watt (High) | 126 |
| Blade Pitch | 45° |

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF
remote control
with reverse



White wireless
Decora-style,
6-speed, wall
control



NOTE: Only compatible with included controllers.



shown in Matte Black
with 52" Barn Wood blades



Mollywood



Designed by Chicago architect Stephen Katz in 2018, the Mollywood ceiling fan combines modern organic geometry with outstanding performance and function. The blade shape was developed using advanced computer software which allowed the design to achieve a complex form. The result is a clean, natural and contemporary look perfect for any room or décor. Available in matte black, matte white, or textured bronze finishes with either barn wood, matte black, matte white or walnut tone solid wood blade options. Mollywood will complement a variety of design styles while also providing a fresh and unique, modern statement. Constructed of cast aluminum and heavy stamped steel, Mollywood carries a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control



Wall
Control



shown in Matte Black
with 52" Matte Black blades




shown in Matte White
with 42" Matte White blades




shown in Textured Bronze
with 60" Walnut blades

Blade Options



shown in Brushed Brass with
52" Barn Wood blades

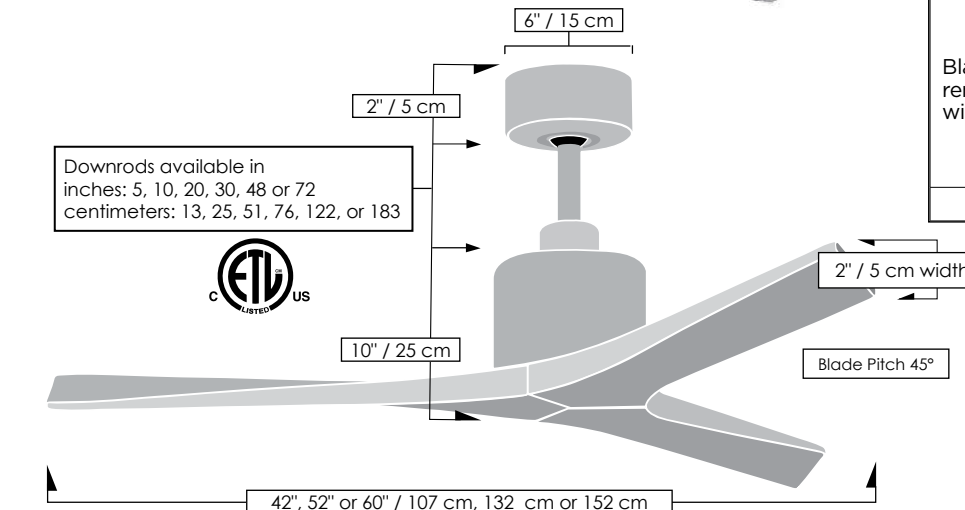

MOLLYWOOD

FINISH AND BLADE OPTIONS

| SKU# | MW-XXX-XXX-XX (Model+Finish+Blade+Diameter) | |
|-------------------|--|------|
| Standard Finishes | Brushed Brass | BRBR |
| | Matte Black | BK |
| | Matte White | MWH |
| | Textured Bronze | TB |
| Blade Finish | Barn Wood | BW |
| | Matte Black | BK |
| | Matte White | MWH |
| | Walnut | WA |
| Fan Diameter | 42 inches / 107 cm | 42 |
| | 52 inches / 132 cm | 52 |
| | 60 inches / 152 cm | 60 |

TECHNICAL SPECS

| | | |
|---|--|--|
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 | |
| Blade Material | CNC Cut Solid Wood | |
| Overall Drop | 12 inches / 30 cm + downrod length | |
| Fan Weight | 18 lbs | |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 | |
| Downrod Diameter | 1 inch | |
| Voltage | 110 (Contact us for 220 conversion) | |
| Motor Type | DC | |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible | |
| Ambience | Silent | |
| Safety Certification | ETL / CETL | |
| Warranty | Limited Lifetime | |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
|-----------------|---------------------|---------------------|---------------------|
| RPM (Low/High) | 51 / 186 | 51 / 129 | 52 / 103 |
| CFM (Low/High) | 524 / 2655 | 997 / 2437 | 658 / 2914 |
| Watts (High) | 31.68 | 31.60 | 34.35 |
| CFM/Watt (High) | 84 | 88 | 83 |
| Blade Pitch | 45° | 45° | 45° |

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Light cover

Black 6-speed RF
remote control
with reverse



White wireless
Decora-style,
6-speed, wall
control



NOTE: Only compatible with included controllers.



shown in Matte White
with 52" Walnut blades

Nan



Designed by Chicago architect Stephen Katz, the Nan ceiling fan is a contemporary take on traditional fan design with superior performance and functionality. The Nan fan feels at home in any room or setting from casual to formal and everything in between. This timeless ceiling fan works in residential environments, restaurants, hospitality or even office settings. The Nan fan has the perfect amount of design presence for any size room or season. The fully adjustable fan motor speeds makes moving the right amount of air simple and easy. The Nan fan will feel like a natural part of the room and enhance any space with a fresh breeze. Also available is the larger Nan XL for larger spaces.

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control



Wall
Control



NAN

FINISH AND BLADE OPTIONS

| SKU# | NK-XXX-XXX-XX (Model+Finish+Blade+Diameter) | |
|-------------------|--|------|
| Standard Finishes | Brushed Brass | BRBR |
| | Matte Black | BK |
| | Matte White | MWH |
| | Textured Bronze | TB |
| Blade Finish | Barn Wood | BW |
| | Gray Ash | GA |
| | Light Maple | LM |
| | Matte Black | BK |
| | Matte White | MWH |
| | Walnut | WA |
| Fan Diameter | 42 inches / 107 cm | 42 |
| | 52 inches / 132 cm | 52 |
| | 60 inches / 152 cm | 60 |

TECHNICAL SPECS

| | |
|---|--|
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 |
| Blade Material | CNC Cut Solid Wood |
| Overall Drop | 12 inches / 30 cm + downrod length |
| Fan Weight | 18 lbs |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Voltage | 110 (Contact us for 220 conversion) |
| Motor Type | DC |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
|------------------|---------------------|---------------------|---------------------|
| RPM (Low / High) | 53 / 235 | 51 / 202 | 51 / 152 |
| CFM (Low / High) | 941 / 5101 | 1692 / 7389 | 2454 / 8251 |
| Watts (High) | 20.37 | 32.61 | 32.58 |
| CFM/Watt (High) | 213 | 220 | 256 |
| Blade Pitch | 15° | 15° | 15° |

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF
remote control
with reverse




White wireless
Decora-style,
6-speed, wall
control



NOTE: Only compatible with included controllers.

Blade Options

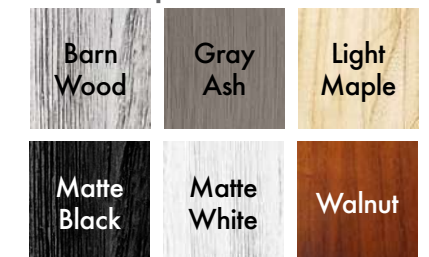






Nan XL


Designed by Chicago architect Stephen Katz, the Nan XL ceiling fan is a revolutionary take on ceiling fans, incorporating traditional design with superior performance and functionality to meet the aesthetic needs and challenges of any space. The Nan XL fan feels at home in any setting from casual to commercial and everything in between. This timeless ceiling fan works in residential environments, restaurants, hospitality or even office settings. The Nan XL fan has the perfect amount of design presence for any size room or season. The fully adjustable fan motor speeds makes moving the right amount of air simple and easy. The Nan XL fan will feel like a natural part of the room and enhance any space with a fresh breeze. Also available is the standard Nan fan with smaller diameter options: 42", 52" and 60".


Product Features



DC Motor



Damp Location




Silent



Remote Control


Wall Control

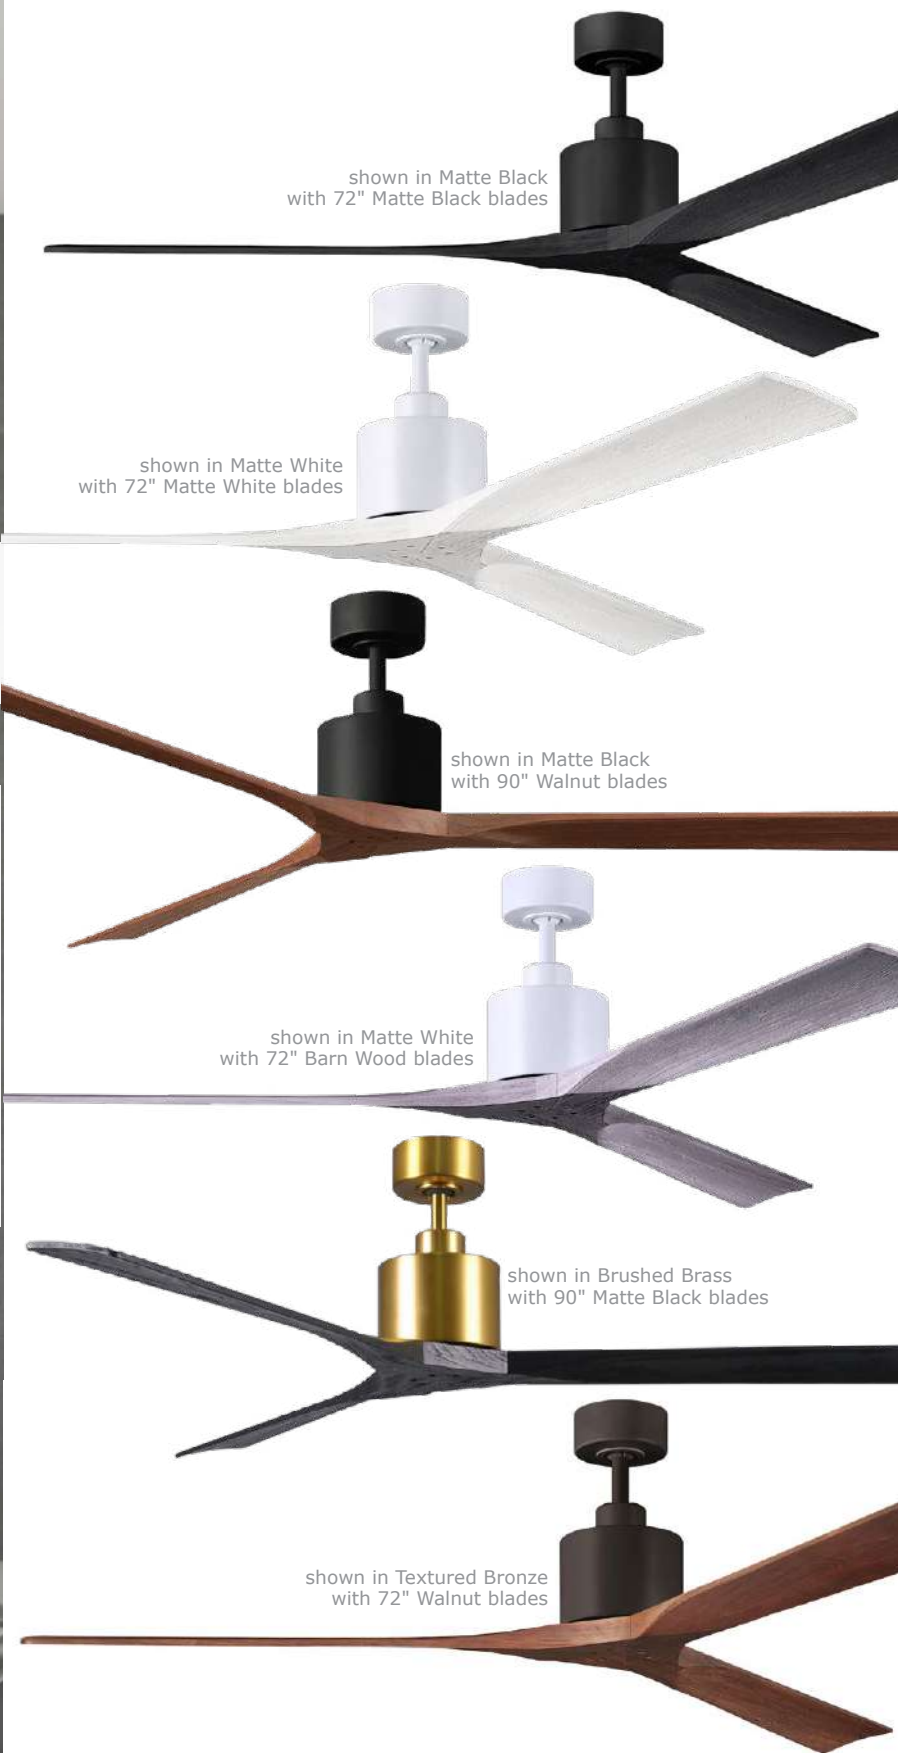
Industrial Fan



| NAN XL | | |
|---|---|---|
| FINISH AND BLADE OPTIONS | | |
| SKU# | NKXL-XXX-XXX-XX (Model+Finish+Blade+Diameter) | |
| Standard Finishes | Brushed Brass | BRBR |
| | Black | BK |
| | Matte White | MWH |
| | Textured Bronze | TB |
| Blade Finish | Barn Wood | BW |
| | Gray Ash | GA |
| | Light Maple | LM |
| | Matte Black | BK |
| | Matte White | MWH |
| | Walnut | WA |
| Fan Diameter | 72 inches / 183 cm | 72 |
| | 90 inches / 229 cm | 90 |
| TECHNICAL SPECS | | |
| Fan Diameter | inches: 72 or 90 centimeters: 183 or 229 | |
| Blade Material | CNC Cut Solid Wood | |
| Overall Drop | 12 inches / 30 cm + downrod length | |
| Fan Weight | 19 lbs | |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 | |
| Downrod Diameter | 1 inch | |
| Voltage | 110 (Contact us for 220 conversion) | |
| Motor Type | DC | |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible | |
| Ambience | Silent | |
| Safety Certification | ETL / CETL | |
| Warranty | Limited Lifetime | |
| INDUSTRIAL CEILING FAN ESTIMATED EFFICIENCY DATA | | |
| Fan Diameter | 72 inch / 183 cm | 90 inch / 229 cm |
| RPM (Low / High) | 48 / 86 | 28 / 143 |
| CFM (Low / High) | 3727 / 11,302 | 4257 / 13,687 |
| Watts (High) | 36.08 | 31.59 |
| CFM/Watt (High) | 339 | 456 |
| Blade Pitch | 15° | 15° |
| STANDARD EQUIPMENT | | |
| One downrod of 10 inches / 25 cm | | |
| Vaulted ceiling canopy for up to 30° | | |
| Black 6-speed RF remote control with reverse |  | White wireless Decora-style, 6-speed, wall control |
| | |  |
| NOTE: Only compatible with included controllers. | | |

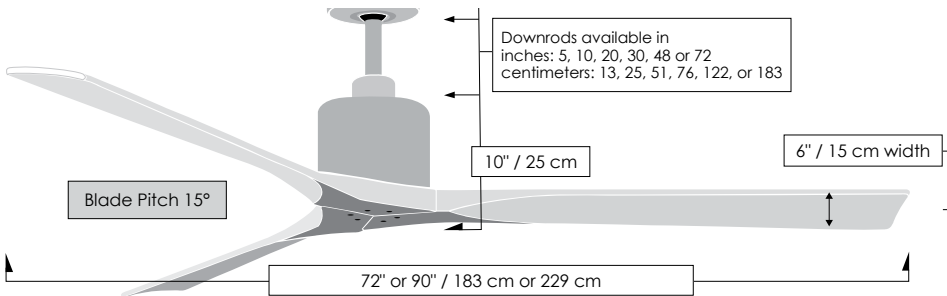

Blade Options





Patrícia-3

A complement to any commercial or residential space, the Patrícia-3 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-3 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-3 carries a limited lifetime warranty.

Product Features

DC Motor

Damp Location

Silent

LED Lamp

Dimmable Lamp

Remote Control

Wall Control

shown in Brushed Brass with 42" Walnut blades

shown in Polished Chrome with 42" Matte Black blades

shown in Gloss White with 60" Matte White blades

shown in Brushed Nickel with 42" Barn Wood blades

shown in Textured Bronze with 42" Walnut blades

Blade Options

Barn Wood

Matte Black

Matte White

Walnut

6" / 15 cm

2" / 5 cm

Blade Pitch 15°

Downrods available in inches: 5, 10, 20, 30, 48 or 72 centimeters: 13, 25, 51, 76, 122, or 183

10" / 25 cm

2" / 5 cm

2" / 5 cm

7" / 18 cm width

42", 52" or 60" / 107 cm, 132 cm or 152 cm

ETL LISTED US

PATRÍCIA-3

FINISH AND BLADE OPTIONS

| SKU# | PA3-XX-XXX-XX (Model+Finish+Blade+Diameter) | |
|-------------------|--|------|
| Standard Finishes | Brushed Brass | BRBR |
| | Brushed Nickel | BN |
| | Polished Chrome | CR |
| | Textured Bronze | TB |
| | Gloss White | WH |
| Blade Finishes | Matte Black | BK |
| | Barn Wood Tone | BW |
| | Matte White | MW |
| | Walnut Tone | WA |
| Fan Diameter | 42 inches / 107 cm | 42 |
| | 52 inches / 132 cm | 52 |
| | 60 inches / 152 cm | 60 |

TECHNICAL SPECS

| | |
|----------------------|---|
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 |
| Blade Material | CNC Cut Solid Wood |
| Overall Drop | 14 inches / 36 cm + downrod length |
| Fan Weight | 19 lbs |
| Downrods Lengths | inches: 5, 10, 20, 30, 48, 72 <i>Field cuttable. Non-threaded</i> centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Voltage | 110 or 220 |
| Motor Type | DC |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
|------------------|------------------|------------------|------------------|
| RPM (Low / High) | 52 / 232 | 51 / 219 | 51 / 156 |
| CFM (Low / High) | 860 / 4286 | 1283 / 6077 | 2113 / 6833 |
| Watts (High) | 16.60 | 32.03 | 31.72 |
| CFM/Watt (High) | 211 | 182 | 219 |
| Blade Pitch | 15° | 15° | 15° |

LIGHT KIT PHOTOMETRICS

| Lamping (Replaceable) | Integrated LED |
|----------------------------|----------------|
| Remote Dimmable | Yes |
| Delivered Temperature in K | 3075 |
| Delivered Lumens | 690 |
| CRI | 90 |
| Watts | 16 |
| Hours | 60,000 |

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Light cover

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control



NOTE: Only compatible with included controllers.



Patrícia-5



shown in Brushed Nickel
with 52" Barn Wood blades



A complement to any commercial or residential space, the Patrícia-5 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-5 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-5 carries a limited lifetime warranty.

Product Features

DC Motor

Damp Location

Silent

LED Lamp

Dimmable Lamp

Remote Control

Wall Control

shown in Brushed Brass
with 42" Matte Black blades

shown in Matte Black
with 42" Matte Black blades

shown in Gloss White
with 52" Matte White blades

shown in Polished Chrome
with 42" Barn Wood blades

shown in Textured Bronze
with 60" Walnut blades

Blade Options

Barn Wood

Matte Black

Matte White

Walnut

6" / 15 cm
2" / 5 cm
Blade Pitch 15°
Downrods available in inches: 5, 10, 20, 30, 48 or 72 centimeters: 13, 25, 51, 76, 122, or 183
10" / 25 cm
2" / 5 cm
6" / 15 cm width
42", 52" or 60" / 107 cm, 132 cm or 152 cm

PATRÍCIA-5

FINISH AND BLADE OPTIONS

| SKU# | PA5-XX-XXX-XX (Model+Finish+Blade+Diameter) | |
|-------------------|--|------|
| Standard Finishes | Brushed Brass | BRBR |
| | Brushed Nickel | BN |
| | Polished Chrome | CR |
| | Textured Bronze | TB |
| | Gloss White | WH |
| Blade Finishes | Matte Black | BK |
| | Barn Wood Tone | BW |
| | Matte Black | BK |
| | Matte White | MWH |
| Fan Diameter | Walnut Tone | WA |
| | 42 inches / 107 cm | 42 |
| | 52 inches / 132 cm | 52 |
| | 60 inches / 152 cm | 60 |

TECHNICAL SPECS

| | |
|---|--|
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 |
| Blade Material | CNC Cut Solid Wood |
| Overall Drop | 14 inches / 36 cm + downrod length |
| Fan Weight | 19 lbs |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Voltage | 110 or 220 |
| Motor Type | DC |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm | 52 inch / 132 cm | 60 inch / 152 cm |
|------------------|---------------------|---------------------|---------------------|
| RPM (Low / High) | 53 / 221 | 51 / 186 | 51 / 87 |
| CFM (Low / High) | 917 / 4386 | 1398 / 5524 | 3247 / 5547 |
| Watts (High) | 30.47 | 31.80 | 31.64 |
| CFM/Watt (High) | 137 | 170 | 194 |
| Blade Pitch | 15° | 15° | 15° |

LIGHT KIT PHOTOMETRICS

| | |
|----------------------------|----------------|
| Lamping (Replaceable) | Integrated LED |
| Remote Dimmable | Yes |
| Delivered Temperature in K | 3075 |
| Delivered Lumens | 690 |
| CRI | 90 |
| Watts | 16 |
| Hours | 60,000 |

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

- One downrod of 10 inches / 25 cm
- Vaulted ceiling canopy for up to 30°

Light cover

Black 6-speed RF
remote control
with reverse

White wireless
Decora-style,
6-speed, wall
control with
reverse

NOTE: Only compatible with included controllers.



Super Janet

shown in Matte Black
with 52" Barn Wood blades

shown in Gloss White
with 42" Matte White blades

shown in Brushed Nickel
with 52" Walnut blades

shown in Matte Black
with 52" Matte Black blades

shown in Textured Bronze
with 60" Barn Wood blades

The Super Janet's remarkable design and solid construction in cast aluminum and heavy stamped steel make it the heroine in any commercial or residential space. Moving air with barely a whisper, its efficient DC motor turns solid wood blades in walnut, matte black, matte white, or barn wood tones. An eco-conscious LED light kit with light cover completes the package. Sophisticated, efficient and green, Super Janet carries a limited lifetime warranty.

Product Features



DC Motor



Damp Location



Silent



LED Lamp



Dimmable Lamp



Remote Control



Wall Control



Unipack Shipping*

SUPER JANET

FINISH AND BLADE OPTIONS

| SKU# | SJ-XX-XXX-XX (Model+Finish+Blade+Diameter) | |
|-------------------|---|------------|
| Standard Finishes | Brushed Nickel | BN |
| | Gloss White | WH |
| | Matte Black | BK |
| | Textured Bronze | TB |
| Blade Finishes | Barn Wood Tone | BW |
| | Matte Black | BK |
| | Matte White | MWH |
| | Walnut Tone | WN |
| Fan Diameter | 42 inches / 107 cm | 42 |
| | 52 inches / 132 cm | 52 |
| | 60 inches / 152 cm | 60 |

TECHNICAL SPECS

| | |
|---|--|
| Fan Diameter | inches: 42, 52 or 60 centimeters: 107, 132 or 152 |
| Blade Material | CNC Cut Solid Wood |
| Overall Drop | 12 inches / 30 cm + downrod length |
| Fan Weight | 17 lbs |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | 1 inch |
| Voltage | 110 (Contact us for 220 conversion) |
| Motor Type | DC |
| Environment | Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible |
| Ambience | Silent |
| Safety Certification | ETL / CETL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Diameter | 42 inch / 107 cm* | 52 inch / 132 cm* | 60 inch / 152 cm |
|-----------------|----------------------|----------------------|---------------------|
| RPM (Low/High) | 50 / 242 | 50 / 184 | 50 / 150 |
| CFM (Low/High) | 915 / 4530 | 1571 / 5962 | 2293 / 6495 |
| Watts (High) | 23.62 | 32.99 | 33.32 |
| CFM/Watt (High) | 173 | 180 | 205 |
| Blade Pitch | 15° | 15° | 15° |

LIGHT KIT PHOTOMETRICS

| | |
|----------------------------|----------------|
| Lamping (Replaceable) | Integrated LED |
| Remote Dimmable | Yes |
| Delivered Temperature in K | 2776 |
| Delivered Lumens | 419 |
| CRI | 94 |
| Watts | 18 |
| Hours | 50,000 |

Light kit longevity if used 6 Hours/Day: 22.8 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF
remote control
with reverse




White wireless
Decora-style,
6-speed, wall
control



NOTE: Only compatible with included controllers.

*Unipack Shipping for 42"and 52" in diameters only.

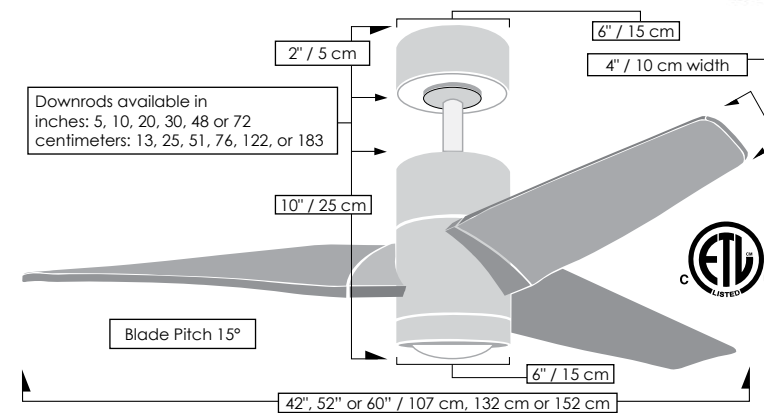

Blade Options





shown in Polished Chrome
with wood blades



Ar Ruthiane



The Ar Ruthiane's unique hourglass support arms grasp bullet-shaped motor housings which rotate 360° about its teardrop center. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.

Product Features



American Labor



Hand Made



AC Motor



360° Rotation



Safety Cage Compatible



Damp Location



Soothing White Noise



Wall Control



Unipack Shipping

shown in
Polished Copper
with wood blades





shown in Black
with wood blades



shown in Brushed Nickel
with metal blades and
decorative cage



shown in Polished Brass
with wood blades

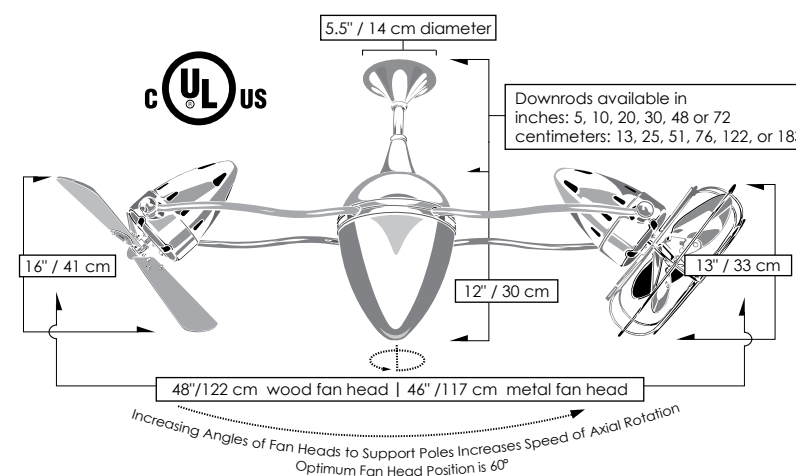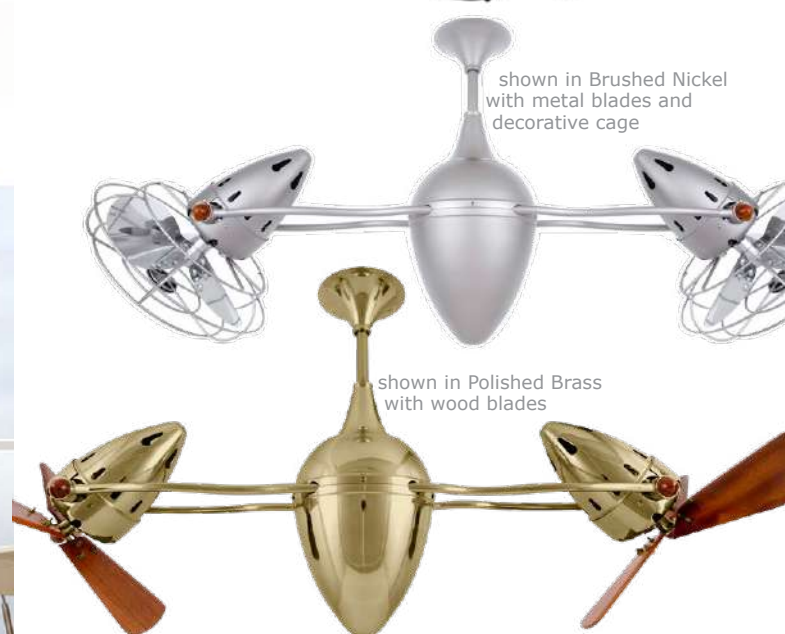

AR RUTHIANE

FINISH AND BLADE OPTIONS

| SKU# | AR-XXXXXX-XXX (Model+Finish+Blade) | |
|------------------------|---------------------------------------|----------|
| Standard Finishes | Black | BK |
| | Bronzette | BZZT |
| | Brushed Nickel | BN |
| Special Order Finishes | Brushed Brass | BRBR |
| | Brushed Copper | BRCP |
| | Polished Brass | PB |
| | Polished Chrome | CR |
| | Polished Copper | CP |
| | Polished Chrome Damp | CRDAMP |
| | Brushed Nickel Damp | BNDAMP |
| | Gloss White | WH |
| | Agua Marinha | LTBLUE |
| | Ametista | LTPURPLE |
| | Black Nickel | BKN |
| | Esmeralda | GREEN |
| | Ouro | GOLD |
| | Rubi | RED |
| | Safira | BLUE |
| Fan Blade | Solid Mahogany | WD |
| | Wood Blade Metal Blade | MTL |


TECHNICAL SPECS

| | |
|---|--|
| Fan Weight | 21 lbs |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Rotation | Yes |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | .75 inch |
| Overall Drop | 12 inches / 30 cm + downrod length |
| Environment | Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible. |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Head Options | Solid Mahogany Wood | Metal with Guard |
|--------------------|---------------------|---|
| Fan Diameter | 48 inches / 122 cm | 46 inches / 117 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Decorative Cage or Safety Cage with tight tines |
| RPM (Low / High) | 723 / 1308 | 591 / 1075 |
| CFM (Low / High) | 2644 / 4724 | 1215 / 2371 |
| Watts (High) | 96.94 | 103.53 |
| CFM/Watt (High) | 48.73 | 22.90 |
| Blade Pitch | 19° | 31° |

STANDARD EQUIPMENT


| | |
|---|---|
| One downrod of 10 inches / 25 cm |  |
| Flat ceiling canopy | |
| Decora-style, 3-speed wall control in white | |
| OPTIONAL EQUIPMENT | |
| 29° vaulted ceiling mount and canopy | |



Special Order Finishes



Standard Finishes





Bianca Direcional



Unique and versatile, the fan head of the Bianca Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Bianca can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Bianca Direcional carries a limited lifetime warranty.

Product Features



American Labor



Hand Made



AC Motor



180° Adjustable



Safety Cage Compatible



Damp Location




Soothing White Noise




Wall Control



Unipack Shipping

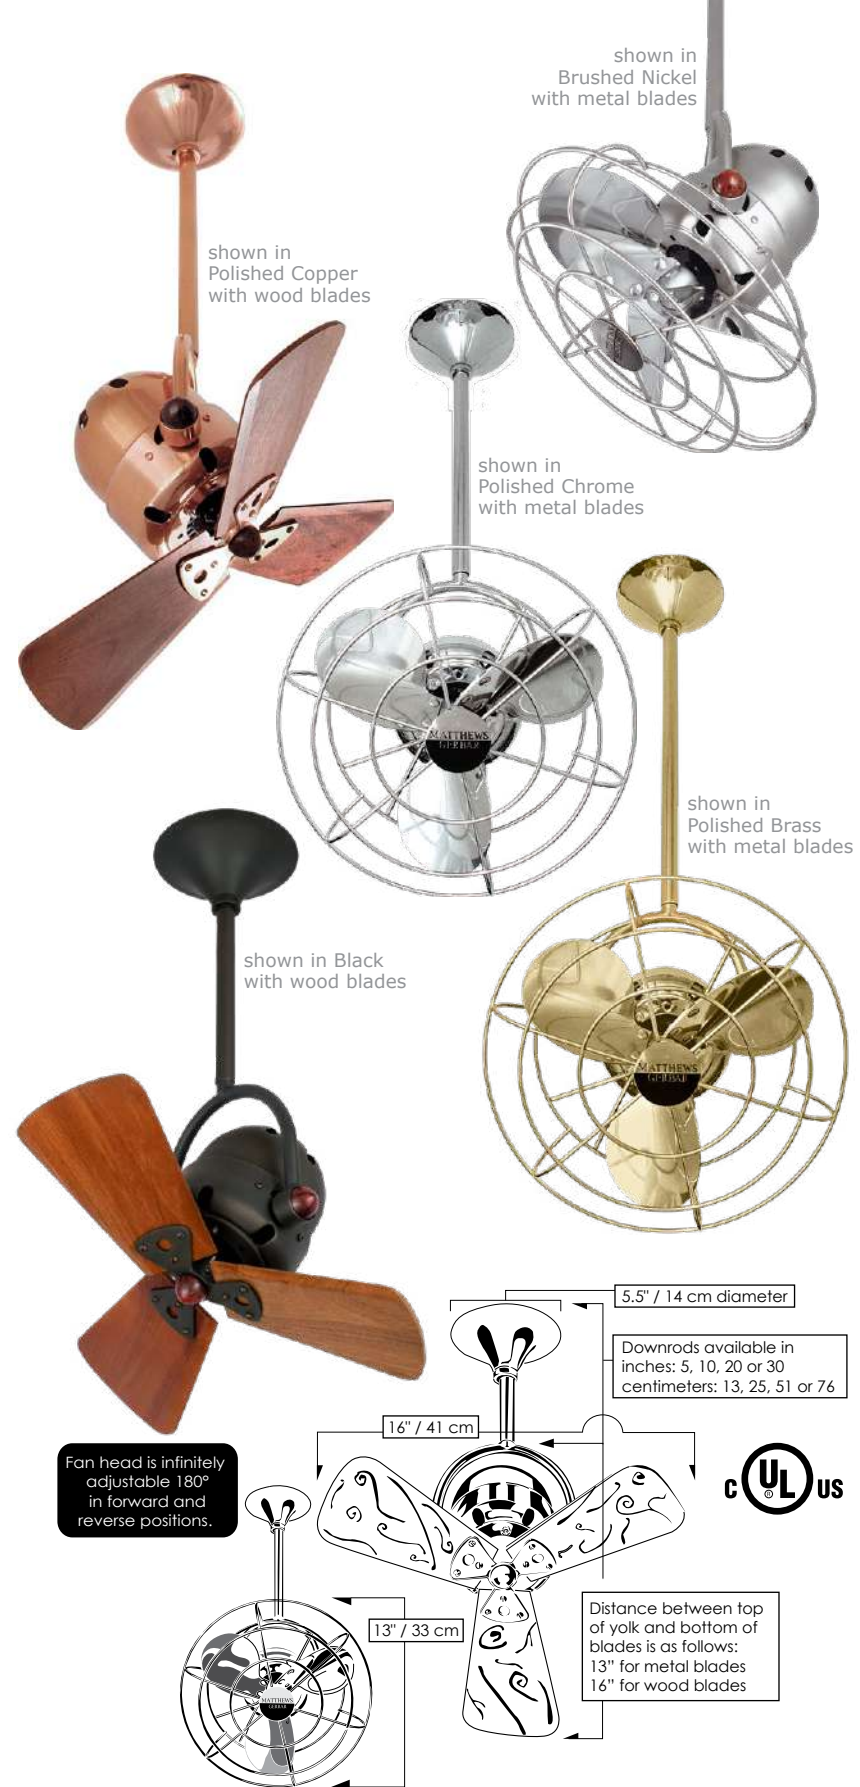

Special Order Finishes



BIANCA DIRECIONAL

FINISH AND BLADE OPTIONS

| SKU# | BD-XXXXXX-XX (Model+Finish+Blade) | |
|-------------------|--|---|
| Standard Finishes | Black Bronzette Brushed Nickel | BK BZZT BN |
| Special Order | Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira | BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE |
| Fan Blade | Solid Mahogany Wood Blade Metal Blade | WD MTL |

TECHNICAL SPECS

| | | |
|---|--|---------------------------------------|
| Fan Weight | 7 lbs | |
| Voltage | 110 or 220 | |
| Motor Type | AC | |
| Oscillation | No | |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76 | |
| Downrod Diameter | .75 inch | |
| Overall Drop | Metal Blades: | 13 inches / 33 cm + downrod length |
| | Wood Blades: | 16 inches / 41 cm + downrod length |
| Environment | Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible. | |
| Ambience | Soothing White Noise | |
| Safety Certification | UL / CUL | |
| Warranty | Limited Lifetime | |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA


| Fan Head Options | Solid Mahogany Wood | Metal with Guard |
|--------------------|---------------------|---|
| Fan Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Decorative Cage or Safety Cage with tight tines |
| RPM (Low / High) | 926 / 1280 | 615 / 1149 |
| CFM (Low / High) | 1568 / 2274 | 814 / 1199 |
| Watts (High) | 47.46 | 49.00 |
| CFM/Watt (High) | 47.91 | 24.47 |
| Blade Pitch | 19° | 31° |

STANDARD EQUIPMENT

| |
|---|
| One downrod of 10 inches / 25 cm |
| Flat ceiling canopy (Not compatible with vaulted ceiling canopy) |
| Decora-style, 3-speed wall control in white |



Standard Finishes





Brisa 2000

shown in Black with Wood blade



shown in Gloss White with metal blades in safety cage



shown in Polished Copper with wood blades




shown in Brushed Nickel with metal blades in safety cage



shown in Bronzette with wood blades



shown in Black with metal blades in safety cage

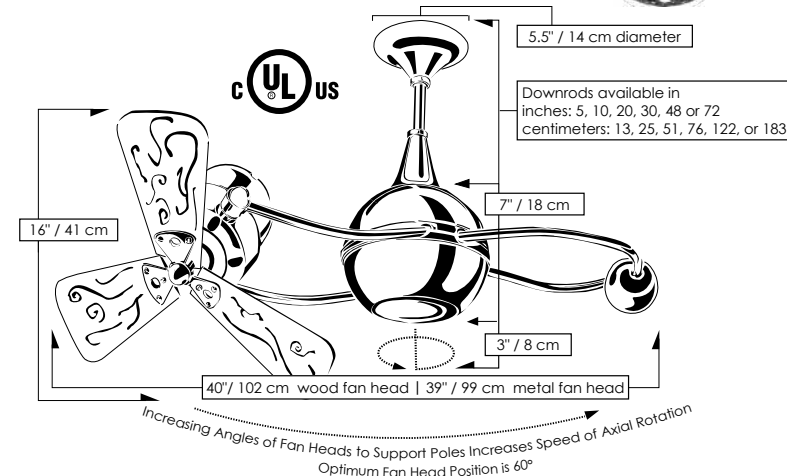

Like satellites orbiting a planet, the Brisa's select mahogany blade head and lunar counterweight gently revolve 360° about its spherical gear housing. The fan head can be infinitely positioned in a 180-degree arc for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Brisa carries a limited lifetime warranty.

Product Features



American Labor



Hand Made



AC Motor



360° Rotation



Safety Cage Compatible



Damp Location



Soothing White Noise



Wall Control



Unipack Shipping*

Special Order Finishes



BRISA 2000

FINISH AND BLADE OPTIONS

| SKU# | B2K-XXXXXX-XXX (Model+Finish+Blade) | |
|-------------------|--|----------|
| Standard Finishes | Black | BK |
| | Bronzette | BZZT |
| | Brushed Nickel | BN |
| Special Order | Brushed Brass | BRBR |
| | Brushed Copper | BRCP |
| | Polished Brass | PB |
| | Polished Chrome | CR |
| | Polished Copper | CP |
| | Polished Chrome Damp | CRDAMP |
| | Brushed Nickel Damp | BN DAMP |
| | Gloss White | WH |
| | Agua Marinha | LTBLUE |
| | Ametista | LTPURPLE |
| | Black Nickel | BKN |
| | Esmeralda | GREEN |
| | Ouro | GOLD |
| Fan Blade | Solid Mahogany | WD |
| | Wood Blade Metal Blade | MTL |


TECHNICAL SPECS

| | |
|---|--|
| Fan Weight | 21 lbs |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Rotation | Yes |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | .75 inch |
| Overall Drop | 10 inches / 25 cm + downrod length |
| Environment | Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible. |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA


| Fan Head Options | Solid Mahogany Wood* | Metal with Guard |
|--------------------|----------------------|---|
| Fan Diameter | 40 inches / 102 cm | 39 inches / 99 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Decorative Cage or Safety Cage with tight tines |
| RPM (Low / High) | 866 / 1336 | 790 / 1205 |
| CFM (Low / High) | 1602 / 2376 | 790 / 1265 |
| Watts (High) | 52.44 | 55.15 |
| CFM/Watt (High) | 45.31 | 22.94 |
| Blade Pitch | 19° | 31° |

STANDARD EQUIPMENT

| | |
|--|---|
| One downrod of 10 inches / 25 cm |  |
| Flat ceiling canopy | |
| Decora-style, 3-speed wall control in white | |
| OPTIONAL EQUIPMENT | |
| 29° vaulted ceiling mount and canopy | |
| NOTE: *Unipack Shipping for Wood Blades only | |



Standard Finishes





Bruna Parede

The Bruna Parede is reminiscent of the wall fans of the early 20th century. The fan head of the Bruna Parede wall mounted fan can be infinitely positioned vertically and horizontally across 180-degree arcs to provide maximum directional airflow. It can be mounted in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any space. Constructed of cast aluminum, heavy spun and stamped steel, the Bruna Parede carries a limited lifetime warranty.

Product Features



American Labor



Hand Made



AC Motor



180° Adjustable



Safety Cage Compatible



Damp Location




Soothing White Noise



Wall Control



Unipack Shipping

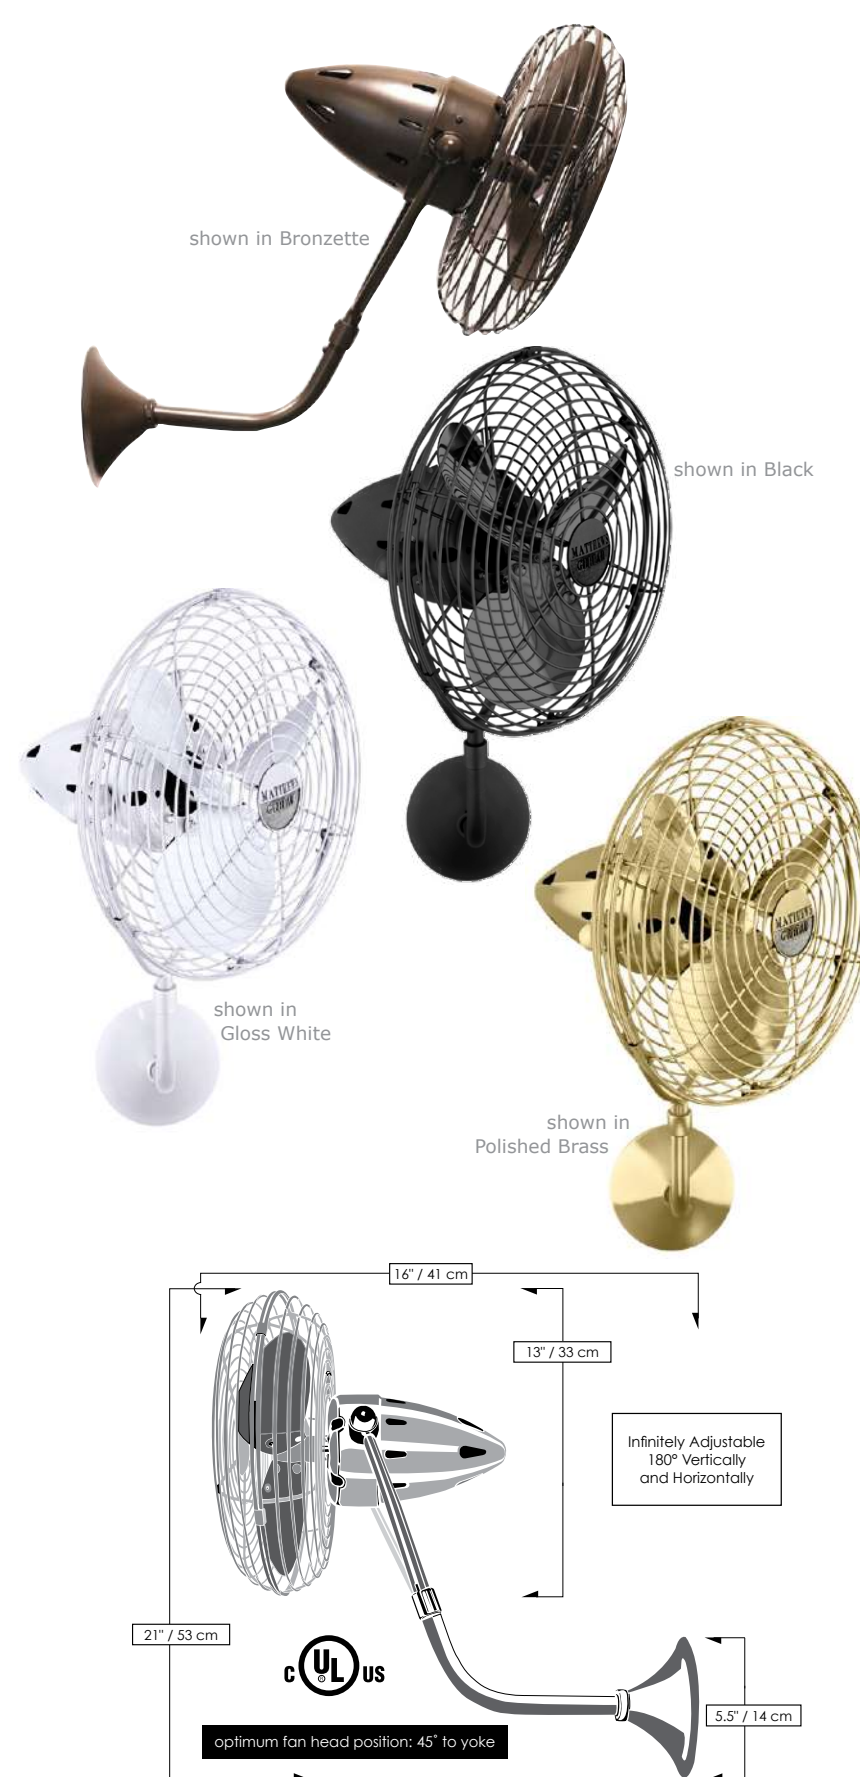

BRUNA PAREDE

FINISH AND BLADE OPTIONS

| SKU# | BP-XXXXXX (Model+Finish) | |
|-------------------|-----------------------------|----------|
| Standard Finishes | Black | BK |
| | Bronzette | BZZT |
| | Brushed Nickel | BN |
| Special Order | Brushed Brass | BRBR |
| | Brushed Copper | BRCP |
| | Polished Brass | PB |
| | Polished Chrome | CR |
| | Polished Copper | CP |
| | Polished Chrome Damp | CRDAMP |
| | Brushed Nickel Damp | BNDAMP |
| | Gloss White | WH |
| | Agua Marinha | LTBLUE |
| | Ametista | LTPURPLE |
| | Black Nickel | BKN |
| | Esmeralda | GREEN |
| | Ouro | GOLD |
| | Rubi | RED |
| | Safira | BLUE |

TECHNICAL SPECS

| | |
|-----------------------------|---|
| Fan Weight | 8 lbs |
| Blade Material | Metal |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Oscillation | No |
| Fan Diameter | 13 inches / 33 cm |
| Fan Height | 21 inches / 51 cm |
| Fan Projection | 16 inches / 41 cm |
| Recommended Mounting Height | Approximately 24 inches / 61 cm from ceiling |
| Fan Guard | Safety Cage |
| Environment | Damp location with powder or clear coat only. Neither coastal, saltwater nor chlorine compatible. |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| | |
|------------------|-------------|
| RPM (Low / High) | 1021 / 1418 |
| CFM (Low / High) | 839 / 1181 |
| Watts (High) | 49.00 |
| CFM/Watt (High) | 24.01 |
| Blade Pitch | 31° |

STANDARD EQUIPMENT

| | |
|---|--|
| Safety cage | |
| Side-mounted wall junction box | |
| Decora-style, 3-speed wall control in white | |

Special Order Finishes

| | | | | | | | |
|------------------|-------------------|-------------------|--------------------|--------------------|----------------------------|---------------------------|----------------|
| Agua Marinha | Ametista | Black Nickel | Esmeralda | Ouro | Rubi | Safira | |
| Brushed Brass | Polished Brass | Brushed Copper | Polished Copper | Polished Chrome | Polished Chrome Damp | Brushed Nickel Damp | Gloss White |

Standard Finishes

| | | |
|-------------|------------------------|----------------|
| Matte Black | Bronzette (Powdercoat) | Brushed Nickel |
|-------------|------------------------|----------------|

shown in Polished Chrome
with metal blades and
decorative cage



shown in Black with
metal blades in decorative cage




shown in Brushed Nickel
with metal blades in
decorative cage



shown in
Polished Brass
with wood blades



shown in Polished Copper
with wood blades

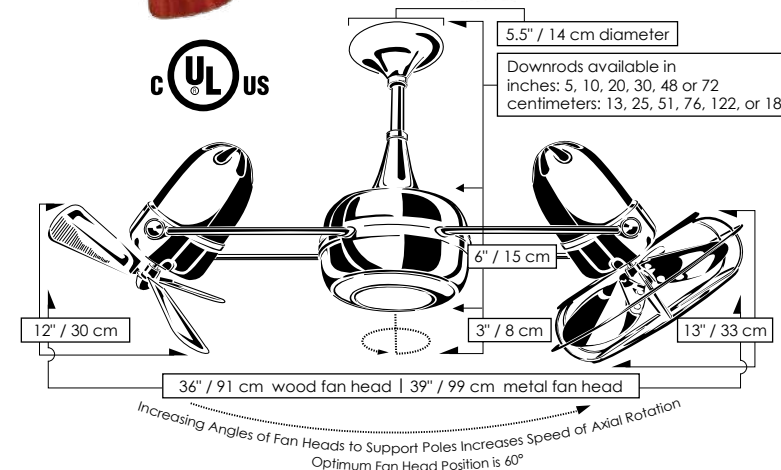

DUPLO-DINAMICO

FINISH AND BLADE OPTIONS

| SKU# | DD-XXXXXX-XXX (Model+Finish+Blade) | |
|-------------------|---|-----------|
| Standard Finishes | Black | BK |
| | Bronzette | BZZT |
| | Brushed Nickel | BN |
| Special Order | Brushed Brass | BRBR |
| | Brushed Copper | BRCP |
| | Polished Brass | PB |
| | Polished Chrome | CR |
| | Polished Copper | CP |
| | Polished Chrome Damp | CRDAMP |
| | Brushed Nickel Damp | BNDAMP |
| | Gloss White | WH |
| | Agua Marinha | LTBLUE |
| | Ametista | LTPURPLE |
| | Black Nickel | BKN |
| | Esmeralda | GREEN |
| | Ouro | GOLD |
| | Rubi | RED |
| | Safira | BLUE |
| Fan Blade | Solid Mahogany Wood Blade Metal Blade | WD MTL |

TECHNICAL SPECS

| | |
|---|--|
| Fan Weight | 21 lbs |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Rotation | Yes |
| Downrods Lengths <i>Field cuttable.</i> <i>Non-threaded</i> | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | .75 inch |
| Overall Drop | 9 inches / 23 cm + downrod length |
| Environment | Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible. |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Head Options | Solid Mahogany Wood* | Metal with Guard |
|--------------------|----------------------|---|
| Fan Diameter | 36 inches / 91 cm | 39 inches / 99 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Decorative Cage or Safety Cage with tight times |
| RPM (Low / High) | 1274 / 1534 | 598 / 1109 |
| CFM (Low / High) | 2673 / 3210 | 1240 / 2274 |
| Watts (High) | 74.06 | 103.35 |
| CFM/Watt (High) | 43.34 | 22.00 |
| Blade Pitch | 19° | 31° |

STANDARD EQUIPMENT

| |
|--|
| One downrod of 10 inches / 25 cm |
| Flat ceiling canopy |
| Decora-style, 3-speed wall control in white |
| OPTIONAL EQUIPMENT |
| 29° vaulted ceiling mount and canopy |
| NOTE: *Unipack Shipping for Wood Blades only |



Product Features



American Labor



Hand Made



AC Motor



360° Rotation



Safety Cage Compatible



Damp Location



Soothing White Noise



Wall Control



Unipack Shipping*

Special Order Finishes

| | | | | | | |
|---------------|----------------|----------------|-----------------|-----------------|----------------------|---------------------|
| Agua Marinha | Ametista | Black Nickel | Esmeralda | Ouro | Rubi | Safira |
| Brushed Brass | Polished Brass | Brushed Copper | Polished Copper | Polished Chrome | Polished Chrome Damp | Brushed Nickel Damp |

Standard Finishes

| | | |
|-------------|------------------------|----------------|
| Matte Black | Bronzette (Powdercoat) | Brushed Nickel |
|-------------|------------------------|----------------|

Few designs can match the timeless and sophisticated aesthetic of the Duplo-Dinamico 360° rotational fan. Other manufacturers have tried to reproduce this unique design, though all have proven to be of lesser quality and durability. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Duplo carries a limited lifetime warranty.



shown in Black with metal blades and decorative cage



Italo Ventania



The Italo Ventania is the largest 360° rotational fan in the Matthews Fan Co collection. Its vortex sculpted arms grasp also remarkable, side-mounted fan heads in gentle, equatorial rotation. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.

Product Features

American Labor

Hand Made

AC Motor

360° Rotation

Safety Cage Compatible

Damp Location

Soothing White Noise

Wall Control

Unipack Shipping



Special Order Finishes

Agua Marinha

Ametista

Black Nickel

Esmeralda

Ouro

Rubi

Safira

Brushed Brass

Polished Brass

Brushed Copper

Polished Copper

Polished Chrome

Polished Chrome Damp

Brushed Nickel Damp

Gloss White

Standard Finishes

Matte Black

Bronzette (Powdercoat)

Brushed Nickel

ITALO VENTANIA

FINISH AND BLADE OPTIONS

| SKU# | IV-XXXXXX-XXX (Model+Finish+Blade) | |
|-------------------|---------------------------------------|----------|
| Standard Finishes | Black | BK |
| | Bronzette | BZZT |
| Special Order | Brushed Nickel | BN |
| | Brushed Brass | BRBR |
| | Brushed Copper | BRCP |
| | Polished Brass | PB |
| | Polished Chrome | CR |
| | Polished Copper | CP |
| | Polished Chrome Damp | CRDAMP |
| | Brushed Nickel Damp | BNDAMP |
| | Gloss White | WH |
| | Agua Marinha | LTBLUE |
| | Ametista | LTPURPLE |
| | Black Nickel | BKN |
| | Esmeralda | GREEN |
| | Ouro | GOLD |
| | Rubi | RED |
| | Safira | BLUE |
| Fan Blade | Solid Mahogany | WD |
| | Wood Blade Metal Blade | MTL |

TECHNICAL SPECS

| | |
|---|--|
| Fan Weight | 24 lbs |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Rotation | Yes |
| Downrods Lengths Field cuttable. Non-threaded | inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183 |
| Downrod Diameter | .75 inch |
| Overall Drop | 14 inches / 36 cm + downrod length |
| Environment | Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible. |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Head Options | Solid Mahogany Wood | Metal with Guard |
|--------------------|---------------------|---|
| Fan Diameter | 62 inches / 157 cm | 60 inches / 152 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Decorative Cage or Safety Cage with tight tines |
| RPM (Low / High) | 715 / 1209 | 685 / 1139 |
| CFM (Low / High) | 2644 / 4519 | 1372 / 2278 |
| Watts (High) | 91.63 | 94.76 |
| CFM/Watt (High) | 49.32 | 24.04 |
| Blade Pitch | 19° | 31° |

STANDARD EQUIPMENT

| One downrod of 10 inches / 25 cm |
|---|
| Flat ceiling canopy |
| Decora-style, 3-speed wall control in white |
| OPTIONAL EQUIPMENT |
| 29° vaulted ceiling mount and canopy |





Jarold Direcional

shown in Polished Copper with metal blades and safety cage

shown in Polished Copper with wood blades

shown in Brushed Nickel with metal blades in decorative cage

shown in Gloss White with wood blades

shown in Polished Brass with Metal blades in safety cage

shown in Black with metal blades in safety cage

Unique and versatile, the fan head of the Jarold Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Jarold can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Jarold Direcional carries a limited lifetime warranty.

Product Features



American Labor



Hand Made



AC Motor



180° Adjustable



Safety Cage Compatible



Damp Location



Soothing White Noise



Wall Control



Unipack Shipping

Special Order Finishes

| | | | | | | |
|---------------|----------------|----------------|-----------------|-----------------|----------------------|---------------------|
| Agua Marinha | Ametista | Black Nickel | Esmeralda | Ouro | Rubi | Safira |
| Brushed Brass | Polished Brass | Brushed Copper | Polished Copper | Polished Chrome | Polished Chrome Damp | Brushed Nickel Damp |
| Gloss White | | | | | | |

Standard Finishes

| | | |
|-------------|------------------------|----------------|
| Matte Black | Bronzette (Powdercoat) | Brushed Nickel |
|-------------|------------------------|----------------|

JAROLD DIRECIONAL

FINISH AND BLADE OPTIONS

| SKU# | JD-XXXXXX-XX (Model+Finish+Blade) | |
|-------------------|-----------------------------------|----------|
| Standard Finishes | Black | BK |
| | Bronzette | BZZT |
| Special Order | Brushed Nickel | BN |
| | Brushed Brass | BRBR |
| | Brushed Copper | BRCP |
| | Polished Brass | PB |
| | Polished Chrome | CR |
| | Polished Copper | CP |
| | Polished Chrome Damp | CRDAMP |
| | Brushed Nickel Damp | BNDAMP |
| | Gloss White | WH |
| | Agua Marinha | LTBLUE |
| | Ametista | LTPURPLE |
| | Black Nickel | BKN |
| | Esmeralda | GREEN |
| | Ouro | GOLD |
| | Rubi | RED |
| | Safira | BLUE |
| Fan Blade | Solid Mahogany | WD |
| | Wood Blade | MTL |
| | Metal Blade | |

TECHNICAL SPECS


| | | |
|---|--|------------------------------------|
| Fan Weight | 7 lbs | |
| Voltage | 110 or 220 | |
| Motor Type | AC | |
| Oscillation | No | |
| Downrods Lengths <i>Field cuttable. Non-threaded</i> | inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76 | |
| Downrod Diameter | .75 inch | |
| Overall Drop | Metal Blades: | 13 inches / 33 cm + downrod length |
| | Wood Blades: | 16 inches / 41 cm + downrod length |
| Environment | Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible. | |
| Ambience | Soothing White Noise | |
| Safety Certification | UL / CUL | |
| Warranty | Limited Lifetime | |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Head Options | Solid Mahogany Wood | Metal with Guard |
|--------------------|---------------------|---|
| Fan Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Decorative Cage or Safety Cage with tight tines |
| RPM (Low / High) | 955 / 1318 | 615 / 1149 |
| CFM (Low / High) | 1701 / 2368 | 800 / 1162 |
| Watts (High) | 46.77 | 48.39 |
| CFM/Watt (High) | 50.63 | 24.01 |
| Blade Pitch | 19° | 31° |

STANDARD EQUIPMENT

| | |
|--|--|
| One downrod of 10 inches / 25 cm | |
| Flat ceiling canopy (Not compatible with vaulted ceiling canopy) | |
| Decora-style, 3-speed wall control in white | |

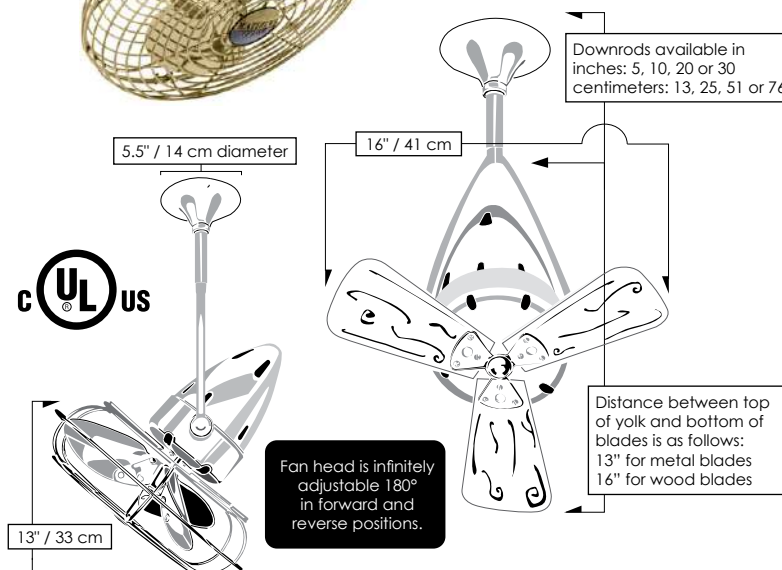



shown in
Polished Chrome
with metal blades



Michelle Parede



The Michelle Parede is reminiscent of wall fans of the early 20th century. The fan head of the Michelle Parede wall mounted fan can be infinitely positioned vertically and horizontally across 180-degree arcs to provide maximum directional airflow. It can be mounted in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any space. Constructed of cast aluminum, heavy spun and stamped steel, the Michelle Parede carries a limited lifetime warranty.

Product Features

American Labor

Hand Made

AC Motor

180° Adjustable

Safety Cage Compatible

Damp Location

Soothing White Noise

Wall Control

Unipack Shipping




shown in
Gloss White

shown in
Polished Copper

shown in
Black Nickel

shown in Black

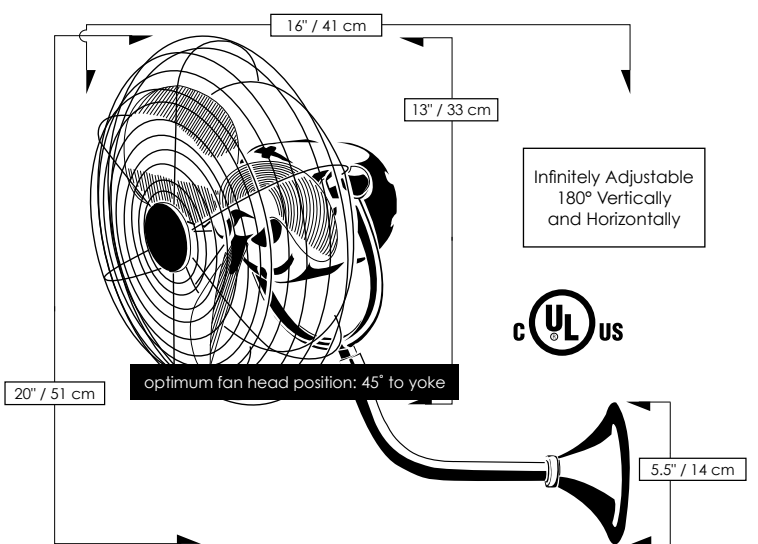

Special Order Finishes

Agua Marinha

Ametista

Black Nickel

Esmeralda

Ouro

Rubi

Safira

Brushed Brass

Polished Brass

Brushed Copper

Polished Copper

Polished Chrome

Polished Chrome Damp

Brushed Nickel Damp

Gloss White

MICHELLE PAREDE

FINISH AND BLADE OPTIONS

| SKU# | MP-XXXXXX (Model+Finish) | |
|-------------------|-----------------------------|----------|
| Standard Finishes | Black | BK |
| | Bronzette | BZZT |
| | Brushed Nickel | BN |
| Special Order | Brushed Brass | BRBR |
| | Brushed Copper | BRCP |
| | Polished Brass | PB |
| | Polished Chrome | CP |
| | Polished Copper | CP |
| | Polished Chrome Damp | CRDAMP |
| | Brushed Nickel Damp | BNDAMP |
| | Gloss White | WH |
| | Agua Marinha | LTBLUE |
| | Ametista | LTPURPLE |
| | Black Nickel | BKN |
| | Esmeralda | GREEN |
| | Ouro | GOLD |
| | Rubi | RED |
| | Safira | BLUE |

TECHNICAL SPECS

| | |
|-----------------------------|---|
| Fan Weight | 8 lbs |
| Blade Material | Metal |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Oscillation | No |
| Fan Diameter | 13 inches / 33 cm |
| Fan Height | 20 inches / 51 cm |
| Fan Projection | 16 inches / 41 cm |
| Recommended Mounting Height | Approximately 24 inches / 61 cm from ceiling |
| Fan Guard | Safety Cage |
| Environment | Damp location with powder or clear coat only. Neither coastal, saltwater nor chlorine compatible. |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| | |
|------------------|-------------|
| RPM (Low / High) | 1020 / 1418 |
| CFM (Low / High) | 838 / 1181 |
| Watts (High) | 49.00 |
| CFM/Watt (High) | 24.01 |
| Blade Pitch | 31° |

STANDARD EQUIPMENT

| |
|---|
| Safety cage |
| Side-mounted wall junction box |
| Decora-style, 3-speed wall control in white |

Standard Finishes


Matte Black

Bronzette (Powdercoat)

Brushed Nickel



Vent-Bettina

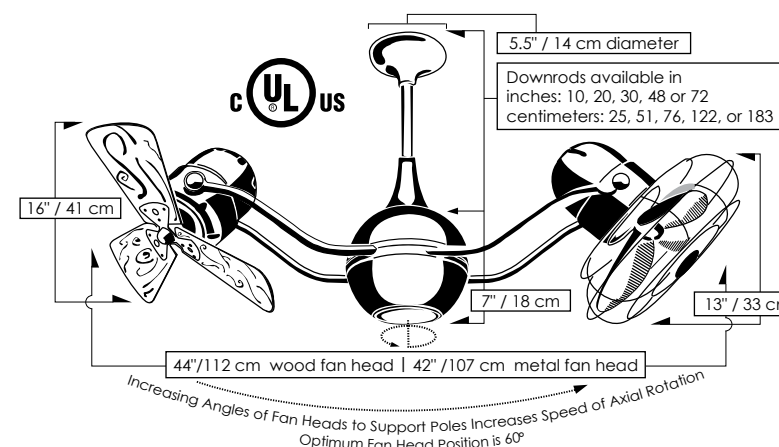

The Vent-Bettina 360° rotational fan is thoughtfully designed with its arms gently upward curving. The fan offers fluid lines and quiet axial rotation with motor heads which can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Vent-Bettina carries a limited lifetime warranty.

Product Features



American Labor



Hand Made



AC Motor



360° Rotation



Safety Cage Compatible



Damp Location



Soothing White Noise



Wall Control

VENT-BETTINA

FINISH AND BLADE OPTIONS

| SKU# | VB-XXXXXX-XXX (Model+Finish+Blade) | |
|-------------------|---------------------------------------|----------|
| Standard Finishes | Black | BK |
| | Bronzette | BZZT |
| Special Order | Brushed Nickel | BN |
| | Brushed Brass | BRBR |
| | Brushed Copper | BRCP |
| | Polished Brass | PB |
| | Polished Chrome | CR |
| | Polished Copper | CP |
| | Polished Chrome Damp | CRDAMP |
| | Brushed Nickel Damp | BNDAMP |
| | Gloss White | WH |
| | Agua Marinha | LTBLUE |
| | Ametista | LTPURPLE |
| | Black Nickel | BKN |
| | Esmeralda | GREEN |
| | Ouro | GOLD |
| | Rubi | RED |
| | Safira | BLUE |
| Fan Blade | Solid Mahogany | WD |
| | Wood Blade | MTL |
| | Metal Blade | |


TECHNICAL SPECS

| | |
|---|--|
| Fan Weight | 19 lbs |
| Voltage | 110 or 220 |
| Motor Type | AC |
| Rotation | Yes |
| Downrods Lengths <i>Field cuttable.</i> <i>Non-threaded</i> | inches: 10, 20, 30, 48, 72 centimeters: 25, 51, 76, 122, 183 |
| Downrod Diameter | .75 inch |
| Overall Drop | 7 inches / 18 cm + downrod length |
| Environment | Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible. |
| Ambience | Soothing White Noise |
| Safety Certification | UL / CUL |
| Warranty | Limited Lifetime |

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

| Fan Head Options | Solid Mahogany Wood | Metal with Guard |
|--------------------|---------------------|---|
| Fan Diameter | 44 inches / 112 cm | 42 inches / 107 cm |
| Fan Blade Diameter | 16 inches / 41 cm | 13 inches / 33 cm |
| Guard Options | No Cage Option | Decorative Cage or Safety Cage with tight tines |
| RPM (Low / High) | 796 / 1252 | 699 / 1101 |
| CFM (Low / High) | 2070 / 329 | 1346 / 2077 |
| Watts (High) | 87.32 | 89.63 |
| CFM/Watt (High) | 37.71 | 23.17 |
| Blade Pitch | 19° | 31° |

STANDARD EQUIPMENT

| | |
|---|---|
| One downrod of 10 inches / 25 cm |  |
| Flat ceiling canopy | |
| Decora-style, 3-speed wall control in white | |
| OPTIONAL EQUIPMENT | |
| 29° vaulted ceiling mount and canopy | |

Special Order Finishes

| | | | | | | |
|------------------|-------------------|-------------------|--------------------|--------------------|----------------------------|---------------------------|
| Agua Marinha | Ametista | Black Nickel | Esmeralda | Ouro | Rubi | Safira |
| Brushed Brass | Polished Brass | Brushed Copper | Polished Copper | Polished Chrome | Polished Chrome Damp | Brushed Nickel Damp |

Standard Finishes

| | | |
|-------------|------------------------|----------------|
| Matte Black | Bronzette (Powdercoat) | Brushed Nickel |
|-------------|------------------------|----------------|



Matthews Fan Company's customer service and technical assistance are available Monday through Friday, 7AM to 7PM CST, at (847) 680-9043.

www.MatthewsFanCo.com